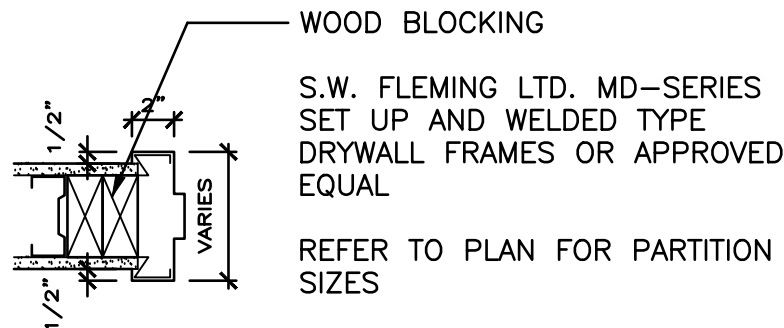
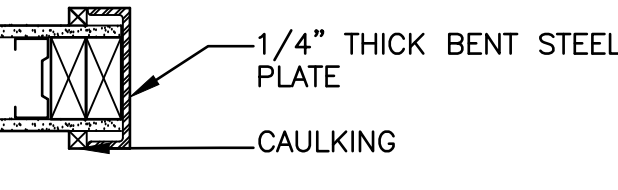


DOOR SCHEDULE													
DOOR NO.	DOOR							FRAME			HARDWARE		REMARKS
	WIDTH	HEIGHT	THICK	TYPE	MATERIAL	FINISH	GLASS	TYPE	MATERIAL	FINISH	GROUP	U.L.C. LABEL	
1	—	—	—	—	—	—	—	—	—	—	—	—	RESERVED
2	—	—	—	—	—	—	—	—	—	—	—	—	RESERVED
3	—	—	—	—	—	—	—	—	—	—	D	—	EXISTING DOOR TO HAVE MAGLOCK INSTALLED. REFER TO ELECTRICAL DRAWINGS FOR ADDITIONAL INFORMATION
4	3'-2"	7'-0"	1-3/4"	V	HOLLOW METAL	PAINTED P13	N/A	4	PRESSED STEEL	PAINTED P13	G, H, I, J, K, L, P	—	FOR DOOR UNDERCUTS REFER TO MECHANICAL DRAWINGS
5	3'-2"	7'-0"	1-3/4"	V	HOLLOW METAL	PAINTED P24	N/A	4	PRESSED STEEL	PAINTED P24	M	—	NO UNDERCUTS PERMITTED ON CONSULT ROOM DOORS
6	3'-6"	7'-0"	1-3/4"	V	HOLLOW METAL	PAINTED P13	N/A	4	PRESSED STEEL	PAINTED P13	N	1 HOUR	DOOR AND FRAME TO OBTAIN A 1 HOUR FIRE RESISTANCE RATING. REFER TO MECHANICAL DRAWINGS FOR FIRE DAMPER GRILLE IN DOOR
7	2'-2"-6"	8'-0"	5/8"	U	IMPACT	—	SEE SPEC	5	METAL	PAINTED P13	—	—	
8	12" SITE VERIFY	SITE VERIFY	3/4"	T	MDF	PLAM 17	N/A	—	—	—	O	—	DOOR TO RECEIVE PLAM FINISH — SEE DOOR TYPE T. COORDINATE WITH BULKHEAD/ CEILING FOR HEIGHT OF DOOR
9	12" SITE VERIFY	SITE VERIFY	3/4"	T	MDF	PLAM 18	N/A	—	—	—	O	—	DOOR TO RECEIVE PLAM FINISH — SEE DOOR TYPE T. COORDINATE WITH BULKHEAD/ CEILING FOR HEIGHT OF DOOR
10	SEE DRAWING	SITE VERIFY	**	S	ALUMINUM	CLEAR ANODIZED	—	**	**	**	—	—	** DISPENSARY SLIDING SECURITY GRILLE. ALL HARDWARE BY DOOR SUPPLIER, SEE PLAN FOR BULKHEAD HEIGHTS AND GRILLE LENGTHS
EX	—	—	—	—	—	PAINTED ***	—	—	—	PAINTED ***	—	—	*** EXISTING METAL DOORS AND FRAMES TO BE PAINTED PART OF INTERIOR FIT UP SCOPE OF WORK.

DOOR FRAME TYPES			NOTE: VERIFY WALL THICKNESS ON DRAWING A1.1
TYPE 1 RESERVED	TYPE 2 RESERVED	TYPE 3 RESERVED	
			
TYPE 4 16 GA PRESSED STEEL	TYPE 5 STEEL PLATE		

DOOR HARDWARE													
ALL LOCKSETS TO BE BEST LOCKSET TO COMPLY WITH LP SECURITY KEYING FUNCTIONS. ALTERNATIVE LOCKSETS ARE NOT PERMITTED													
TYPE D: EMERGENCY EXIT DOOR				TYPE K: FSM OFFICE DOOR									
QUANTITY	ITEM			QUANTITY	ITEM								
1	ENGLISH DECAL – ARM-A-DOR A101-029-003			3	HINGES – CB1900R 4-1/2" X 4" C26D ST								
1	MAGLOCK – REFER TO ELECTRICAL DRAWINGS FOR ADDITIONAL INFORMATION			1	ENTRY LOCKSET – BEST 7KC 37D14 626 BE								
1	POWER SUPPLY – BPS-24-1 SECURITRON POWER SUPPLY AA			1	DOOR CLOSER – 1700/1703 BC COV 689 NO								
MAGLOCK PART OF INTERIOR FIT UP SCOPE OF WORK. SUPPLY, INSTALL AND TIE INTO FIRE ALARM AND VERIFY MAGNETIC LOCK AND POWER SUPPLY.				1	KICK PLATE – K10A 10"X36.5" 32D SM								
SUPPLY & INSTALL ALL DOOR RELATED HARDWARE SPECIFIED.				1	KICK PLATE – K10A 10"X37" 32D SM								
SUPPLY & INSTALL ALL NECESSARY CONTROL WIRING BETWEEN DOOR HARDWARE, CONTROL BOX/POWER SUPPLY AND KEY SWITCH.				1	DOME STOP – S100 26D SM								
PROVIDE LABELS ON KEY SWITCH AS FOLLOWS: "LOCK DOOR" & "UNLOCK DOOR".				1	KICK DOWN HOLDER – 17 C26D CN								
COORDINATE ALL WORK WITH ELECTRICAL & FIRE ALARM CONTRACTOR AND DOOR HARDWARE SUPPLIER/INSTALLER.				TYPE L: IT CLOSET DOOR									
ATTENDANCE BY ALL CONTRACTORS IS REQUIRED DURING THE ENGINEERS TEST AND THE AUTHORITY HAVING JURISDICTION'S TEST. EACH TEST WILL BE CONDUCTED SEPARATELY.													
ALL ELECTROMAGNETIC LOCKS OR EXIT DEVICES MUST RELEASE (UNLOCK) DUE TO THE FOLLOWING CONDITION: FIRE ALARM, FAULT ON THE FIRE ALARM, BUILDING POWER FAILURE, POWER FAILURE TO THE DOOR CONTROLLER/POWER SUPPLY, FAULT ON THE CONTROL CIRCUIT BETWEEN FIRE ALARM PANEL AND THE DOOR CONTROLLER.													
ONCE THE DOOR LOCK HAS BEEN DEACTIVATED, LOCK CAN ONLY BE RESET BY THE CONTROL KEY SWITCH.													
REFER TO THE ELECTRICAL DRAWINGS FOR ADDITIONAL INFORMATION.				TYPE M: CONSULT ROOM DOORS									
DELAY NOT PERMITTED AS PER OBC													
TYPE G: HALLWAY DOOR, STAFF ROOM DOOR, FSM OFFICE DOOR													
QUANTITY	ITEM			QUANTITY	ITEM								
3	HINGES – CB1900R 4-1/2" X 4" C26D ST			3	HINGES – CB1900R 4-1/2" X 4" C26D ST								
1	KEYPAD LOCKSET – POWER PLEX E-2000 626 KA PART#P2031BLLE26-41 (POWER PLEX OPTION – NO BATTERIES)			1	ENTRY LOCKSET – BEST 7KC 37A814 626 BE								
1	DOOR CLOSER – 1700/1703 BC COV 689 NO			1	KICK DOWN HOLDER – 17 C26D CN								
1	KICK PLATE – K10A 10"X36.5" 32D SM			1	KICK PLATE – K10A 10"X36.5" 32D SM								
1	KICK PLATE – K10A 10"X37" 32D SM			1	KICK PLATE – K10A 10"X37" 32D SM								
1	OH DOOR STOP – 10SS X 630 US32D GJ			1	KICK PLATE – K10A 10"X37" 32D SM								
1	KICK DOWN HOLDER – 17 C26D CN			1	DOME STOP – S100 26D SM								
TYPE H: UNIVERSAL WASHROOM DOOR													
QUANTITY	ITEM			QUANTITY	ITEM								
3	HINGES – CB1900R 4-1/2" X 4" C26D ST			3	HINGES – CB1900R 4-1/2" X 4" C26D ST								
1	FAIL SAFE ELECTRIC STRIKE – HES 5200C 630 HES			1	ENTRY LOCKSET – BEST 7KC 37D14 626 BE								
1	ENTRY LOCKSET – BEST 7KC 37D14 626 BE			1	KICK PLATE – K10A 10"X36.5" 32D SM								
1	KICK PLATE – K10A 10"X36.5" 32D SM			1	KICK PLATE – K10A 10"X37" 32D SM								
1	KICK PLATE – K10A 10"X37" 32D SM			1	KICK DOWN HOLDER – 17 C26D CN								
1	KICK DOWN HOLDER – 17 C26D CN			1	DOOR OPERATOR – ASSA ABLOY SW100								
1	CALL FOR ASSISTANCE SYSTEM – OBC BFWASH-1. REFER TO ELECTRICAL DRAWINGS FOR ADDITIONAL INFORMATION			TYPE N: JANITOR CLOSET DOOR									
TYPE I: WASHROOM DOOR													
QUANTITY	ITEM			QUANTITY	ITEM								
3	HINGES – CB1900R 4-1/2" X 4" C26D ST			4	HINGES – CB1900R 4-1/2" X 4" C26D ST								
1	LOCK/ LEVER L940 06B L282-422 626 SC W/ OCCUPANCY INDICATOR			1	PASSAGE LEVER – BEST F75 30N14 626 BE								
1	DOOR CLOSER – 1700/1703 BC COV 689 NO			1	DOOR CLOSER – 1700/1703 BC COV 689 NO								
1	KICK PLATE – K10A 10"X36.5" 32D SM			2	KICK PLATE – K10A 32D SM 10" X WIDTH OF DOOR LESS 1-1/2" 32D SM								
1	KICK PLATE – K10A 10"X37" 32D SM			TYPE O: SLIDING GRILLE POCKET DOOR									
1	KICK DOWN HOLDER – 17 C26D CN												
1	DOOR OPERATOR – ASSA ABLOY SW100												
1	CALL FOR ASSISTANCE SYSTEM – OBC BFWASH-1. REFER TO ELECTRICAL DRAWINGS FOR ADDITIONAL INFORMATION												
TYPE J: CASH COUNTING ROOM DOOR													
QUANTITY	ITEM			QUANTITY	ITEM								
3	HINGES – CB1900R 4-1/2" X 4" C26D ST			1	CONTINUOUS ANODIZED PIANO HINGE								
1	DEADLOCK – 8T-3-7-K STK 626 BE BEST SINGLE SIDED DEADBOLT			1	LOCK AND WATCH RICHELIEU CAM LOCK 15mm 225-081-140								
1	DOOR CLOSER – 1700/1703 BC COV 689 NO			TYPE P: STORAGE LOCK-UP DOOR									
1	HD LOCKSET – BEST 7KC 37D14 626 BE												
1	KICK PLATE – K10A 10"X36.5" 32D SM												
1	KICK PLATE – K10A 10"X37" 32D SM												
1	DOME STOP – S100 26D SM												
1	KICK DOWN HOLDER – 17 C26D CN												
1	STEPN PULL – CLEAR SATIN FINISH												
DOOR NOTES:													
1. REFER TO FLOOR PLAN FOR NUMBER OF DOORS AND SWING OF DOORS.													
2. TYPICAL DOOR PULL AND/OR LEVER MOUNTING HEIGHT: 900 mm MIN AND NOT MORE THAN 1100 mm A.F.F.													
3. ALL HARDWARE TO BE BRUSHED STAINLESS STEEL FINISH.													
4. ALL CLOSERS ARE TO BE INSTALLED ON OFFICE SIDE OF DOOR.													
DOOR NUMBER				NOTES:									
DOOR HARDWARE GROUP LETTER				1. PROVIDE COATHOOKS (2) ON ALL WASHROOM AND ALL OFFICE DOORS. REFER TO DRAWING A7.1 FOR BARRIER FREE HEIGHT									