ZN415-B

BODY ASSEMBLY WITH "TYPE B" STRAINER

SPECIFICATION SHEET

TAG Fin Area FD

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

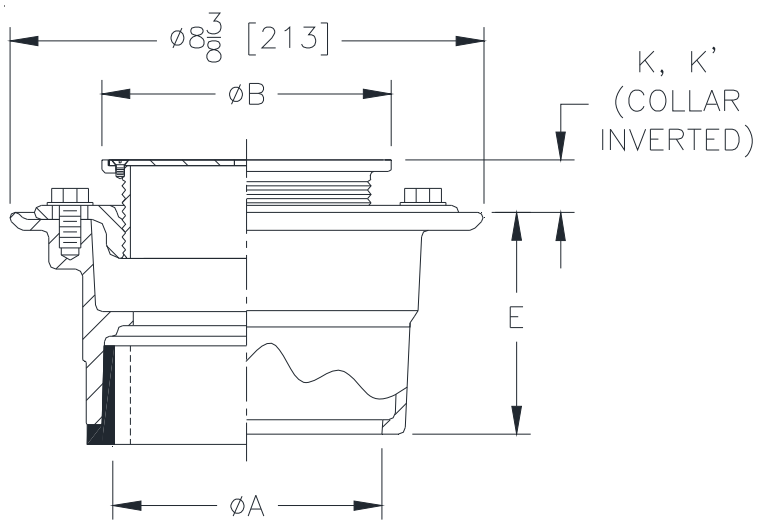

Strainer Designation	Dimensions In Inches [mm]						Approx. Weight lbs [kg]	Strainer Open Area Sq. In. [sq. cm]
	A' Pipe Size	B' Pipe Size	K		K'			
			Min.	Max.	Min.	Max.		
✓ -B5	2,3,4 [51, 76,102]	5 [127]	1/2 [13]	1-5/8 [41]	1-3/8 [35]	2-3/8 [60]	11 [5]	8 [52]
-B6	2,3,4 [51, 76,102]	6 [152]	3/4 [19]	1-3/4 [44]	1-5/8 [41]	2-3/4 [70]	13 [6]	9 [58]
-B7	2,3,4 [51, 76,102]	7 [178]	1 [25]	2-1/4 [57]	2 [51]	3-1/8 [79]	14 [6]	12 [77]
-B8	3,4 [76,102]	8 [203]	1-1/8 [29]	2-1/4 [57]	2 [51]	3-1/8 [79]	16 [7]	18 [116]
-B8	6 [152]	8 [203]	1-1/8 [29]	2-1/4 [57]	2 [51]	3-1/8 [79]	18 [8]	18 [116]

ENGINEERING SPECIFICATION: ZURN ZN-415-B

Floor and Shower Drain, Dura-Coated cast iron body with bottom outlet, combination invertible membrane clamp and adjustable collar with "Type B" polished nickel bronze strainer with stainless steel screws.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

2,3,4 [51,76,102]
2,3,4 [51,76,102]
2,3,4,6 [51,76,102,152]
2,3,4 [51,76,102]
2,3,4 [51,76,102]

(Specify size/type) **OUTLET**

_____ IC Inside Caulk
_____ IG Inside Gasket
_____ IP Threaded
_____ NH No-Hub
_____ NL Neo-Loc

E BODY HT. DIM.

3-7/8 [98]
3-7/8 [98]
2-5/8 [67]
3-7/8 [98]
4-5/8 [117]

SUFFIXES

_____ -AR Acid Resistant Epoxy Coated Cast Iron
_____ -FS Floating Slab
_____ -G Galvanized Cast Iron
_____ -P 1/2" [13mm] Trap Primer Connection
_____ -U 1" [25mm] - 3" [76mm] High Extension Adapter
_____ -VP Vandal-Proof Secured Top
_____ -X Squeezin Backwater Valve
_____ -Y Sediment Bucket
_____ -414 4" [102mm] Diameter Cast Iron Funnel
_____ -6NH 6" [152mm] No-Hub Outlet (6IP w/Z-1040)
_____ -90 2" [51mm], 3" [76mm] or 4" [102mm] Side Outlet Body Assembly (IP or NH only)

* Regularly furnished unless otherwise specified.

Zurn Industries, LLC | **Specification Drainage Operation**
1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929
In Canada | **Zurn Industries Limited**
3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292
www.zurn.com

Rev. B
Date: 07/06/2017
C.N. No. 137250
Prod. | Dwg. No. ZN415-B

Z-536
8" [203mm] DIAMETER HEAVY-DUTY ADJUSTABLE FLOOR DRAIN

SPECIFICATION SHEET

TAG Unfin Area FD

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

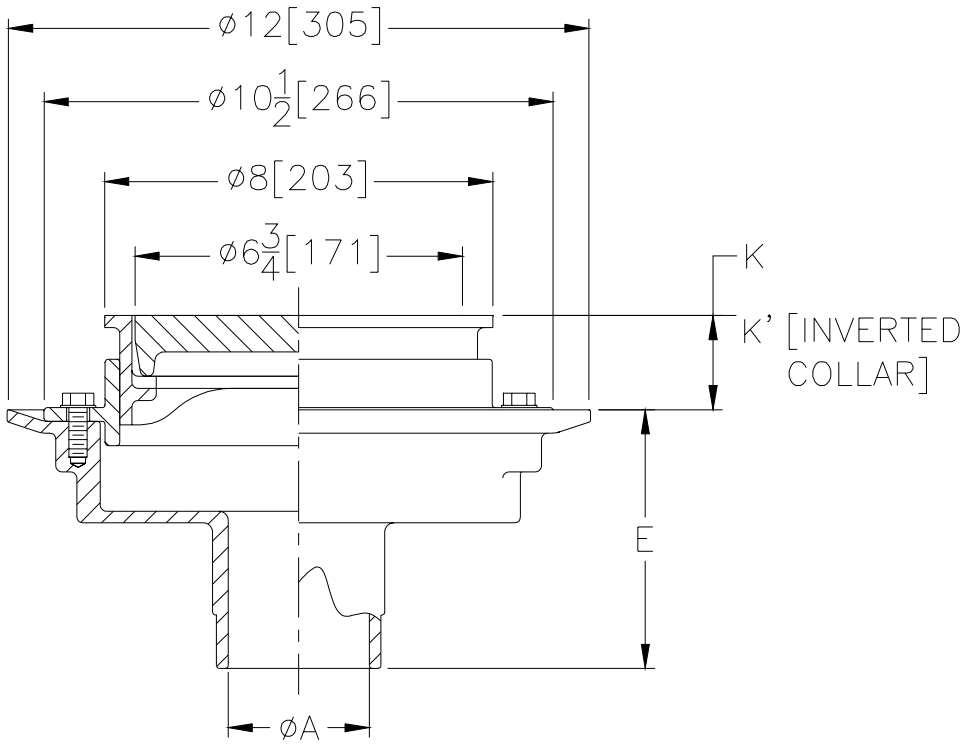

Dimensions In Inches / [mm]					Approx. Wt. Lbs. / [kg]	Grate Open Area Sq. In. / [sq cm]
A Pipe Size Inches / [mm]	K		K'			
	Min.	Max.	Min.	Max.		
3-4-6 [76-102-152]	1-1/2 [38]	2-1/4 [57]	2-1/4 [57]	3 [76]	29 [13]	17 [112]

ENGINEERING SPECIFICATION: ZURN Z-536 8" [203mm] diameter heavy-duty adjustable floor drain, Dura-Coated cast iron bottom outlet body, invertible clamping collar, adjustable leveling frame, and deep grate.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

2 thru 6 [50 thru150]
2 thru 6 [50 thru 150]
2 thru 6 [50 thru 150]
2,3,4 [50,75,100]

(Specify size/type) **OUTLET**

☐	IC	Inside Caulk
☐	IP	Threaded
☐	NH	No-Hub
☐	NL	Neo-Loc

E BODY HT. DIM.

5 1/4 [133]
3 3/4 [95]
5 1/4 [133]
4 5/8 [117]

PREFIXES

- ☑ Z- D.C.C.I. Body with Grate*
- ☐ ZN- D.C.C.I. Body with Polished Nickel Bronze Top*

*Add 3/16" [5mm] to Min./Max. Dimension

SUFFIXES

- ☐ -F0 3-1/2" x 9" [89 x 229] Funnel
- ☐ -G Galvanized
- ☑ -P 1/2" [13mm] Trap Primer Connection
- ☐ -VP Vandal-Proof Secured Top
- ☐ -Y Sediment Bucket

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. A DATE: 1/21/00 C.N. NO. 84099

DWG. NO. 63662 PRODUCT NO. Z-536

ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V 1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292
In the U.S.: ZURN INDUSTRIES, INC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514
Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com

ZN-415-BE
BODY ASSEMLBY WITH "TYPE BE" STRAINER

SPECIFICATION SHEET

TAG FFD FIN AREA

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

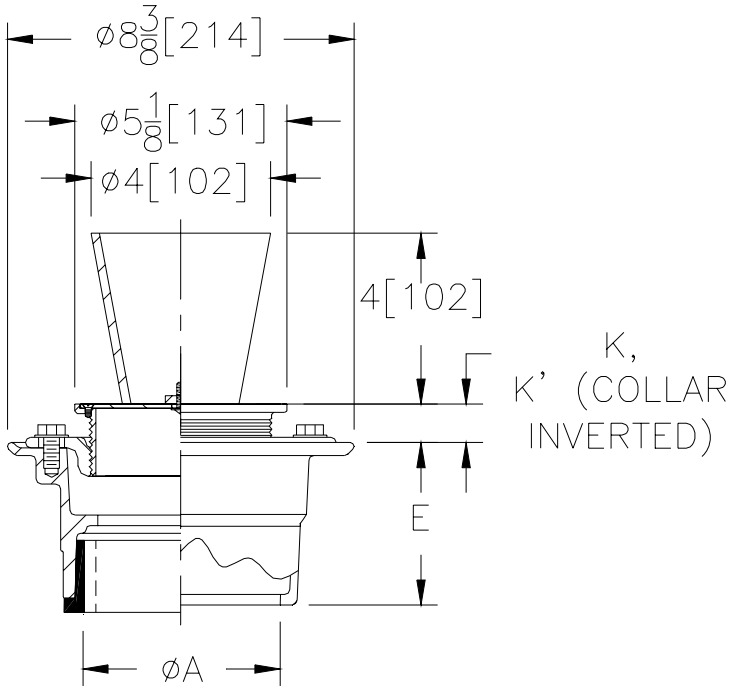

Str. Desig.	Dimensions In Inches / [mm] A Pipe Size	Str. Dia.	K Min.	K Max.	K' Min.	K' Max.	Approx. Wt. Lbs. / (kg)	Strainer Open Area Sq. In. / [sq cm]
-BE5	2-3-4-6 [51-76-102-152]	5 [127]	1/2 [13]	1-5/8 [41]	1-3/8 [35]	2-3/8 [60]	8 [4]	5 [32]

ENGINEERING SPECIFICATION: ZURN ZN-415-BE Funnel Floor Drain, Dura-Coated cast iron body with bottom outlet, combination invertible membrane clamp and adjustable collar with "Type BE" polished nickel bronze round funnel grate with stainless steel screws.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

2,3,4 [50,75,100]
2,3,4 [50,75,100]
2,3,4,6 [50,75,100,152]
2,3,4 [50,75,100]
2,3,4 [50,75,100]

(Specify size/type) **OUTLET**

☐	IC	Inside Caulk
☐	IG	Inside Gasket
☐	IP	Threaded
☐	NH	No-Hub
☐	NL	Neo-Loc

E BODY HT. DIM.

3 7/8 [98]
3 7/8 [98]
2 5/8 [67]
3 7/8 [98]
4 5/8 [117]

SUFFIXES

☐	-AR	Acid Resistant Epoxy Coated Cast Iron
☐	-FS	Floating Slab
☐	-G	Galvanized Cast Iron
☑	-P	1/2" [13mm] Trap Primer Connection
☐	-U	1" [25mm] - 3" [76mm] High Extension Adapter
☐	-VP	Vandal-Proof Secured Top
☐	-X	Squeezin Backwater Valve
☐	-Y	Sediment Bucket
☐	-6NH	6" [152mm] No-Hub Outlet (6IP w/Z-1040)
☐	-90	2" [51mm], 3" [76mm] or 4" [102mm] Side Outlet Body Assembly (IP or NH only)

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. A DATE: 06/16/05 C.N. NO. 89830

DWG. NO. 63638 PRODUCT NO. ZN-415-BE

ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V 1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292
In the U.S.: ZURN INDUSTRIES, INC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514
Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com

ZN415-B

BODY ASSEMBLY WITH "TYPE B" STRAINER

SPECIFICATION SHEET

TAG UNFIN AREA FD

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

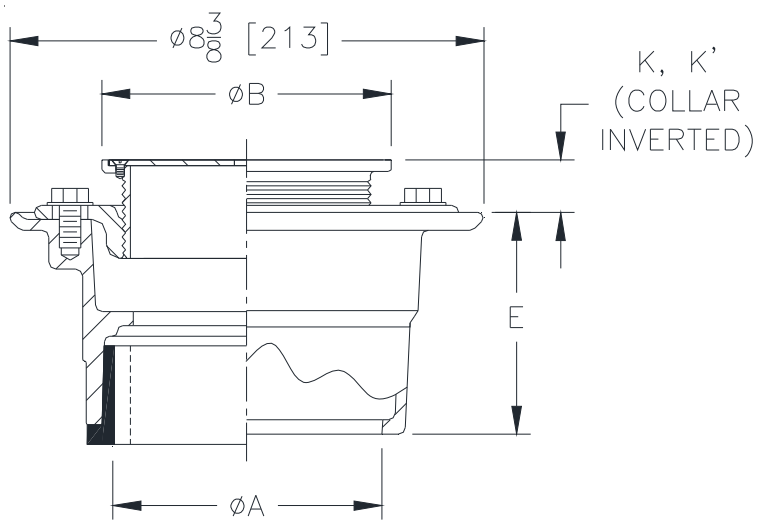

Strainer Designation	Dimensions In Inches [mm]						Approx. Weight lbs [kg]	Strainer Open Area Sq. In. [sq. cm]
	A' Pipe Size	B' Pipe Size	K		K'			
			Min.	Max.	Min.	Max.		
-B5	2,3,4 [51, 76,102]	5 [127]	1/2 [13]	1-5/8 [41]	1-3/8 [35]	2-3/8 [60]	11 [5]	8 [52]
✓ -B6	2,3,4 [51, 76,102]	6 [152]	3/4 [19]	1-3/4 [44]	1-5/8 [41]	2-3/4 [70]	13 [6]	9 [58]
-B7	2,3,4 [51, 76,102]	7 [178]	1 [25]	2-1/4 [57]	2 [51]	3-1/8 [79]	14 [6]	12 [77]
-B8	3,4 [76,102]	8 [203]	1-1/8 [29]	2-1/4 [57]	2 [51]	3-1/8 [79]	16 [7]	18 [116]
-B8	6 [152]	8 [203]	1-1/8 [29]	2-1/4 [57]	2 [51]	3-1/8 [79]	18 [8]	18 [116]

ENGINEERING SPECIFICATION: ZURN ZN-415-B

Floor and Shower Drain, Dura-Coated cast iron body with bottom outlet, combination invertible membrane clamp and adjustable collar with "Type B" polished nickel bronze strainer with stainless steel screws.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

2,3,4 [51,76,102]
2,3,4 [51,76,102]
2,3,4,6 [51,76,102,152]
2,3,4 [51,76,102]
2,3,4 [51,76,102]

(Specify size/type) **OUTLET**

_____ IC Inside Caulk
_____ IG Inside Gasket
_____ IP Threaded
_____ NH No-Hub
_____ NL Neo-Loc

E BODY HT. DIM.

3-7/8 [98]
3-7/8 [98]
2-5/8 [67]
3-7/8 [98]
4-5/8 [117]

SUFFIXES

_____ -AR Acid Resistant Epoxy Coated Cast Iron
_____ -FS Floating Slab
_____ -G Galvanized Cast Iron
_____ -P 1/2" [13mm] Trap Primer Connection
_____ -U 1" [25mm] - 3" [76mm] High Extension Adapter
_____ -VP Vandal-Proof Secured Top
_____ -X Squeezin Backwater Valve
_____ -Y Sediment Bucket
_____ -414 4" [102mm] Diameter Cast Iron Funnel
_____ -6NH 6" [152mm] No-Hub Outlet (6IP w/Z-1040)
_____ -90 2" [51mm], 3" [76mm] or 4" [102mm] Side Outlet Body Assembly (IP or NH only)

* Regularly furnished unless otherwise specified.

Zurn Industries, LLC | **Specification Drainage Operation**
1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929
In Canada | **Zurn Industries Limited**
3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292
www.zurn.com

Rev. B
Date: 07/06/2017
C.N. No. 137250
Prod. | Dwg. No. ZN415-B

SPECIFICATION SHEET

ZXN-415-H

BODY ASSEMBLY WITH "TYPE H" STRAINER

TAG SD _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

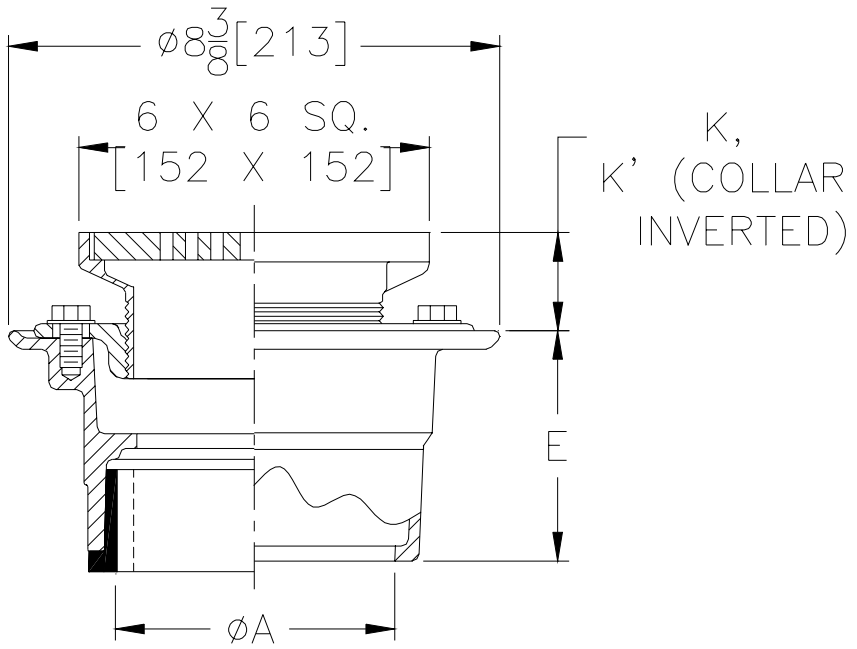

Str. Desig	Dimensions In Inches / [mm] A Pipe Size	Str. Dia.	K Min.	K Max.	K' Min.	K' Max.	Approx. Wt. Lbs. / (kg)	Strainer Open Area Sq. In. / [sq cm]
-H6	2-3-4-6 [51-76-102-152]	6 x 6 [152 x 152]	1-1/4 [32]	2 [51]	2-1/8 [54]	3-1/4 [83]	15 [7]	3 [19]

ENGINEERING SPECIFICATION: ZURN ZXN-415 Floor and Shower Drain, Dura-Coated cast iron body with bottom outlet, combination invertible membrane clamp and adjustable collar with "TYPE H" heavy-duty polished nickel bronze strainer.

OPTIONS (Check/specify appropriate options)

PIPE SIZE	(Specify size/type) **OUTLET**		**'E' BODY HT. DIM.**
2 thru 4 [50 thru 100]	____ IC	Inside Caulk	3 7/8 [98]
2 thru 4 [50 thru 100]	____ IG	Inside Gasket	3 7/8 [98]
2 thru 4, 6 [50 thru 100, 152]	____ IP	Threaded	2 5/8 [67]
2 thru 4 [50 thru 100]	____ NH	No-Hub	3 7/8 [98]
2 thru 4 [50 thru 100]	____ NL	Neo-Loc	4 5/8 [117]

SUFFIXES

____	-AR	Acid Resisting Epoxy Coated Cast Iron
____	-G	Galvanized Cast Iron
☑	-P	1/2" [13] Trap Primer Connection
____	-U	1" [25] - 3" [76] High Extension Adapter
____	-VP	Vandal Proof Secured Top
____	-X	Squeezin Backwater Valve
____	-Y	Sediment Bucket
____	-6NH	6" [152] No-Hub Outlet (6IP w/Z-1040)
____	-90	2" [51], 3" [76] or 4" [102] Side Outlet Body Assembly (IP or NH only)

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV.	DATE: 11/15/99	C.N. NO. 83464
DWG. NO. 65032	PRODUCT NO. ZXN-415-H	

ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V 1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292
In the U.S.: ZURN INDUSTRIES, INC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514
Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com

ZN-415-Y
BODY ASSEMBLY WITH "TYPE Y" STRAINER

SPECIFICATION SHEET

TAG SD

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

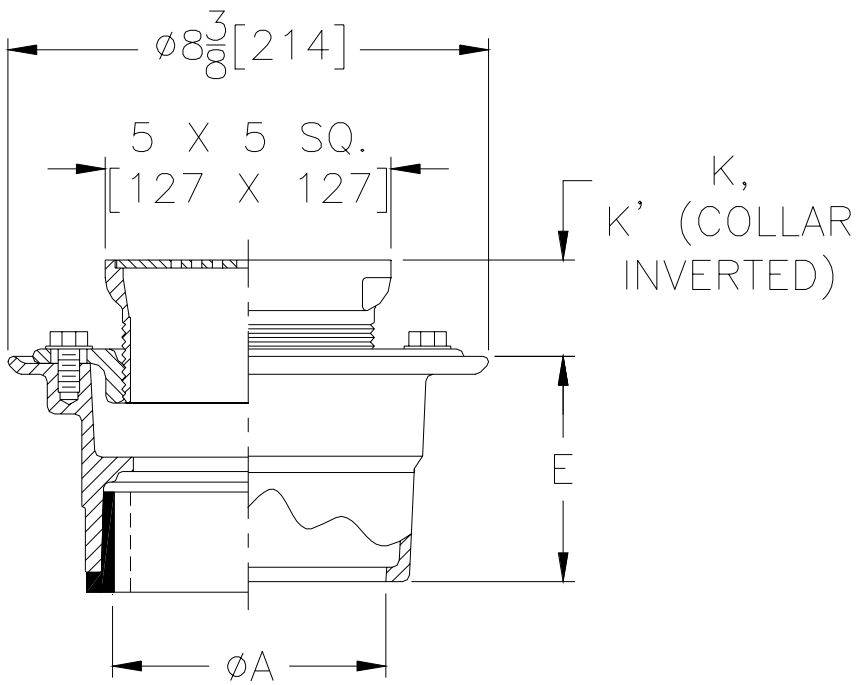

Str. Desig	Dimensions In Inches / [mm] A Pipe Size	B X B' Size	K Min.	K Max.	K' Min.	K' Max.	Approx. Wt. Lbs. / (kg)	Str Open Area Sq. In. / [sq cm]
-Y5	2-3-4-6 [51-76-102-152]	5 x 5 [127 x 127]	1-1/4 [32]	2-1/8 [54]	2 [51]	2-7/8 [73]	10 [5]	9 [58]
✓ -Y6	2-3-4-6 [51-76-102-152]	6 x 6 [152 x 152]	1-1/4 [32]	2-1/8 [54]	2 [51]	2-7/8 [73]	10 [5]	12 [77]

ENGINEERING SPECIFICATION: ZURN ZN-415-Y Floor and Shower Drain, Dura-Coated cast iron body with bottom outlet, combination invertible membrane clamp and adjustable collar with "Type Y" polished nickel bronze square strainer with stainless steel screws.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

2,3,4 [50,75,100]
2,3,4 [50,75,100]
2,3,4,6 [50,75,100,152]
2,3,4 [50,75,100]
2,3,4 [50,75,100]

(Specify size/type) **OUTLET**

____	IC	Inside Caulk
____	IG	Inside Gasket
____	IP	Threaded
____	NH	No-Hub
____	NL	Neo-Loc

E BODY HT. DIM.

3 7/8 [98]
3 7/8 [98]
2 5/8 [67]
3 7/8 [98]
4 5/8 [117]

SUFFIXES

____	-AR	Acid Resistant Epoxy Coated Cast Iron
____	-FS	Floating Slab
____	-G	Galvanized Cast Iron
✓	-P	1/2" [13mm] Trap Primer Connection
____	-U	1" [25mm] - 3" [76mm] High Extension Adapter
____	-VP	Vandal-Proof Secured Top
____	-X	Squeezin Backwater Valve
____	-Y	Sediment Bucket

____	-414	4" [102mm] Diameter Nickel Bronze Funnel
____	-6NH	6" [152mm] No-Hub Outlet (6IP w/Z-1040)
____	-90	2" [51mm], 3" [76mm] or 4" [102mm] Side Outlet Body Assembly (IP or NH only)

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. A DATE: 06/16/05 C.N. NO. 89832

DWG. NO. 63658 PRODUCT NO. ZN-415-Y

ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V 1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292
In the U.S.: ZURN INDUSTRIES, INC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514
Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com

ZS880

STAINLESS STEEL
LINEAR SHOWER DRAIN

SPECIFICATION SHEET

TAG SD

Dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

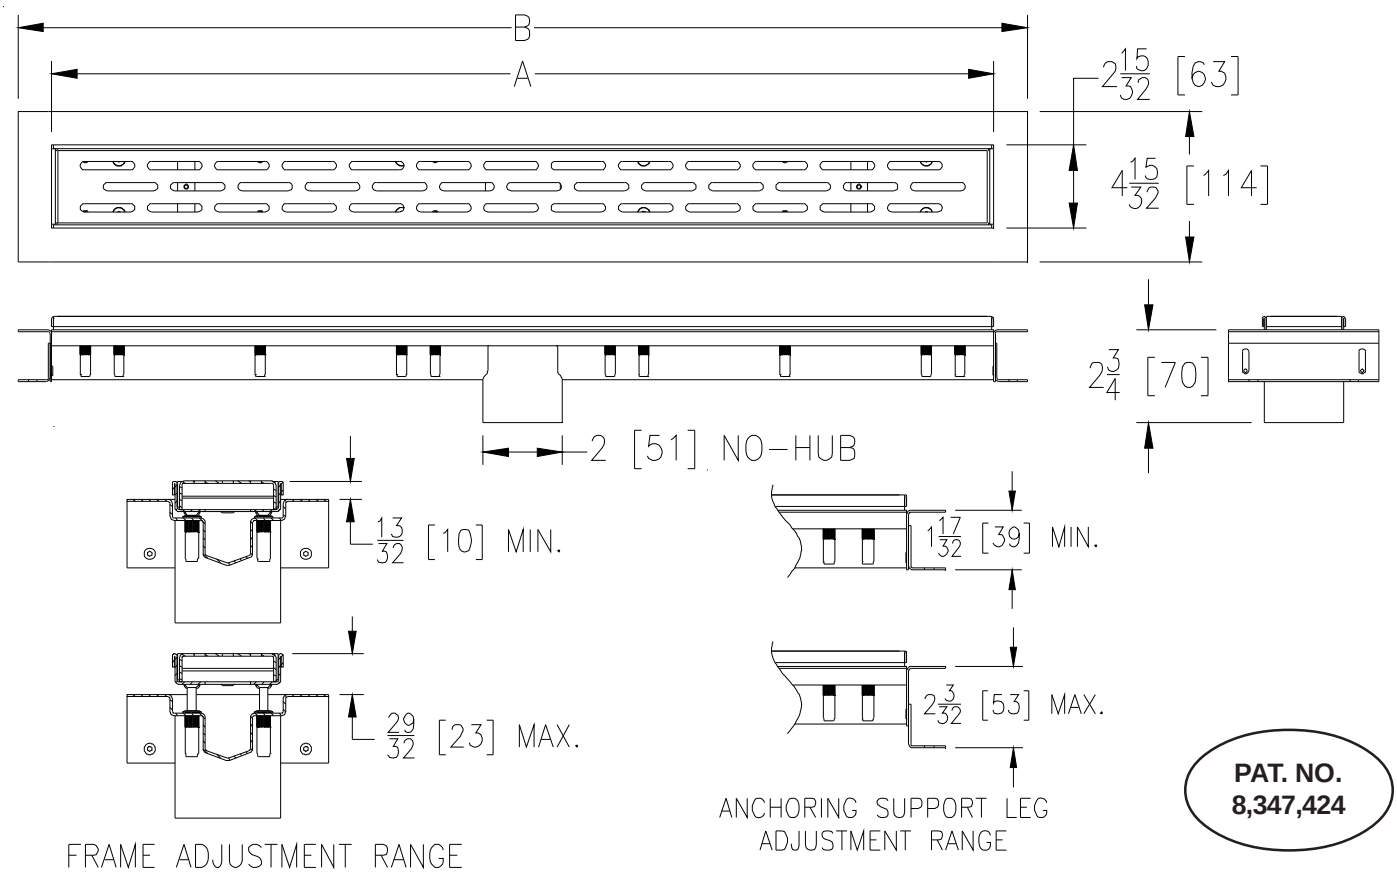

PAT. NO. 8,347,424

Dimensions In Inches			Approx. Wt. Lbs. [kg]	Grate Open Area Sq. In. [cm²]
Product Designation	A	B		
-12	12 [305]	14 [356]	2.9 [1.3]	6 [38]
-28	28 [711]	30 [762]	5.4 [2.5]	15 [97]
-32	32 [813]	34 [864]	5.9 [2.7]	18 [116]
-36	36 [914]	38 [965]	6.4 [2.9]	20 [129]
-40	40 [1016]	42 [1069]	7.2 [3.3]	22 [142]
-48	48 [1219]	50 [1270]	8.4 [3.8]	27 [174]
-60	60 [1524]	62 [1575]	10.3 [4.7]	34 [219]
-72	72 [1829]	74 [1880]	12.4 [5.6]	41 [265]

ENGINEERING SPECIFICATION: ZS880
All Type 304 (CF8) Fabricated Stainless Steel Linear Shower Drain. Complete with vertically adjustable anchoring support legs, anti-ponding V-shaped channel with 2 [51] No-Hub center outlet, adjustable secured leveling frame with built-in tile edge, and secured, light-duty, slotted heel-proof grate. Drain is designed for installation in a minimum 2 [51] concrete pour and can be adjusted to accommodate 1/4 [6] and 3/8 [10] finished tile thicknesses.

OPTIONS (Check/specify appropriate options)

PREFIXES

- ☑ ZS — All Type 304 (CF8) Stainless Steel*
- ☐ ZR — All Type 304 (CF8) Stainless Steel w/ Oil-Rubbed Bronze Finish

GRATE OPTIONS

- ☐ -BW — Basket Weave Grate
- ☐ -DB — Decorative Block Grate
- ☐ -SG — Serenity Grate
- ☐ -TG — Tile In-Lay Grate
- ☐ -WG — Wave Grate

SUFFIXES

- ☐ -2 — Two Bottom Outlets (2 [51] No-Hub, Not Available on Size -12)
- ☐ -2IP — 2 [51] Female IP Threaded Outlet
- ☐ -3 — Three Bottom Outlets (2 [51] No-Hub, Not Available on Size -12)
- ☐ -EO — End Bottom Outlet (2 [51] No-Hub, Not Available on Size -12)
- ☐ -FS — Outlet Filter Screen
- ☐ -LB — Lower Body With Membrane Clamp Collar
- ☐ -SO — Side Outlet (2 [51] No-Hub), Not available with -LB Option

* Regularly furnished unless otherwise specified

Zurn Industries, LLC | **Specification Drainage Operation**
1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929
In Canada | **Zurn Industries Limited**
3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292
www.zurn.com

Rev. E
Date: 11/03/14
C.N. No. 131879
Prod. | Dwg. No. ZS880

Z-415-S
BODY ASSEMBLY
WITH "TYPE S" STRAINER

SPECIFICATION SHEET

TAG HD

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

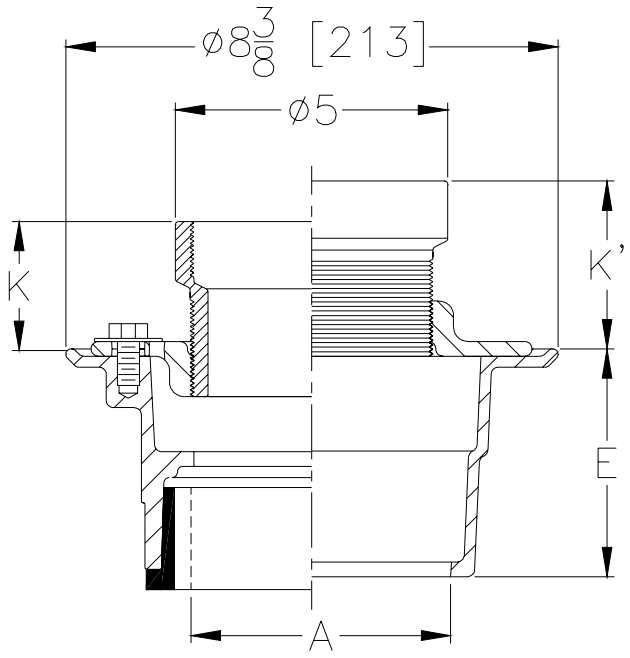

Str. Desig.	Dimensions In Inches / [mm] A Pipe Size	Str. Dia.	K Min.	K Max.	K' Min.	K' Max.	Approx. Wt. Lbs. / (kg)
-S	2-3-4-6 [51-76-102-152]	5 [127]	1-3/8 [35]	2-1/2 [64]	2-1/4 [57]	3-3/8 [86]	10 [5]

ENGINEERING SPECIFICATION: ZURN Z(Z)-415-S Hub Floor Drain, Dura-Coated cast iron body with bottom outlet, combination invertible membrane clamp and adjustable collar with "Type S" circular adjustable hub funnel (Specify Z or ZN).

OPTIONS (Check/specify appropriate options)

PIPE SIZE	(Specify size/type) OUTLET		E BODY HT. DIM.
2,3,4 [50,75,100]		IC Inside Caulk	3 7/8 [98]
2,3,4 [50,75,100]		IG Inside Gasket	3 7/8 [98]
2,3,4,6 [50,75,100,152]		IP Threaded	2 5/8 [67]
2,3,4 [50,75,100]		NH No-Hub	3 7/8 [98]
2,3,4 [50,75,100]		NL Neo-Loc	4 5/8 [117]

SUFFIXES

	-AR	Acid Resistant Epoxy Coated Cast Iron
	-FS	Floating Slab
	-G	Galvanized Cast Iron
✓	-P	1/2" [13] Trap Primer Connection
	-U	1" [25] - 3" [76] High Extension Adapter
	-X	Squeezin Backwater Valve
	-Y	Sediment Bucket
	-6NH	6" [152] No-Hub Outlet (6IP w/Z-1040)
	-90	2" [51], 3" [76] or 4" [102] Side Outlet Body Assembly (IP or NH only)

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV.	DATE: 11/15/99	C.N. NO. 83369
DWG. NO. 63657	PRODUCT NO. Z-415-S	

ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V 1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292
In the U.S.: ZURN INDUSTRIES, INC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514
Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com

Z-415-S
BODY ASSEMBLY
WITH "TYPE S" STRAINER

SPECIFICATION SHEET

TAG HD

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

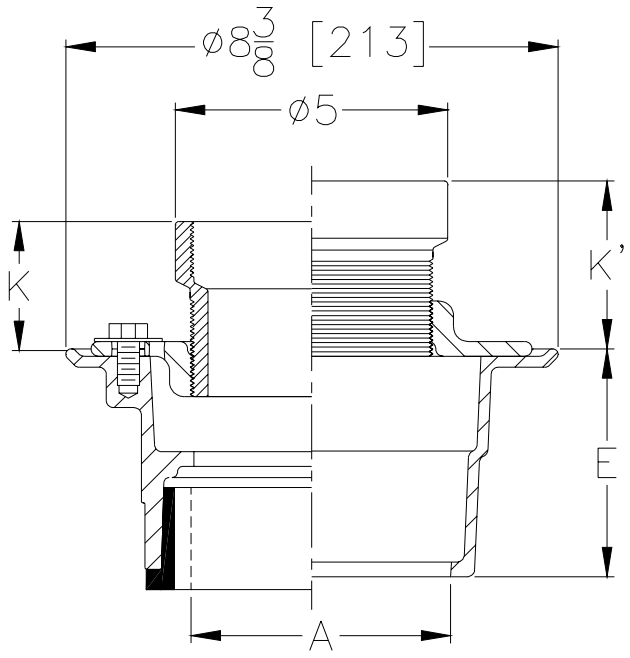

Str. Desig.	Dimensions In Inches / [mm] A Pipe Size	Str. Dia.	K Min.	K Max.	K' Min.	K' Max.	Approx. Wt. Lbs. / (kg)
-S	2-3-4-6 [51-76-102-152]	5 [127]	1-3/8 [35]	2-1/2 [64]	2-1/4 [57]	3-3/8 [86]	10 [5]

ENGINEERING SPECIFICATION: ZURN Z(Z)-415-S Hub Floor Drain, Dura-Coated cast iron body with bottom outlet, combination invertible membrane clamp and adjustable collar with "Type S" circular adjustable hub funnel (Specify Z or ZN).

OPTIONS (Check/specify appropriate options)

PIPE SIZE

2,3,4 [50,75,100]
2,3,4 [50,75,100]
2,3,4,6 [50,75,100,152]
2,3,4 [50,75,100]
2,3,4 [50,75,100]

(Specify size/type) **OUTLET**

____	IC	Inside Caulk
____	IG	Inside Gasket
____	IP	Threaded
____	NH	No-Hub
____	NL	Neo-Loc

E BODY HT. DIM.

3 7/8 [98]
3 7/8 [98]
2 5/8 [67]
3 7/8 [98]
4 5/8 [117]

SUFFIXES

____	-AR	Acid Resistant Epoxy Coated Cast Iron
____	-FS	Floating Slab
____	-G	Galvanized Cast Iron
✓	-P	1/2" [13] Trap Primer Connection
____	-U	1" [25] - 3" [76] High Extension Adapter
____	-X	Squeezin Backwater Valve
____	-Y	Sediment Bucket
____	-6NH	6" [152] No-Hub Outlet (6IP w/Z-1040)
____	-90	2" [51], 3" [76] or 4" [102] Side Outlet Body Assembly (IP or NH only)

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. DATE: 11/15/99 C.N. NO. 83369

DWG. NO. 63657 PRODUCT NO. Z-415-S

ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V 1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292
In the U.S.: ZURN INDUSTRIES, INC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514
Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com

ZN1400-HD

"LEVEL-TROL" ADJUSTABLE FLOOR CLEANOUT W/ HEAVY-DUTY TOP

SPECIFICATION SHEET

TAG HD FCO

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

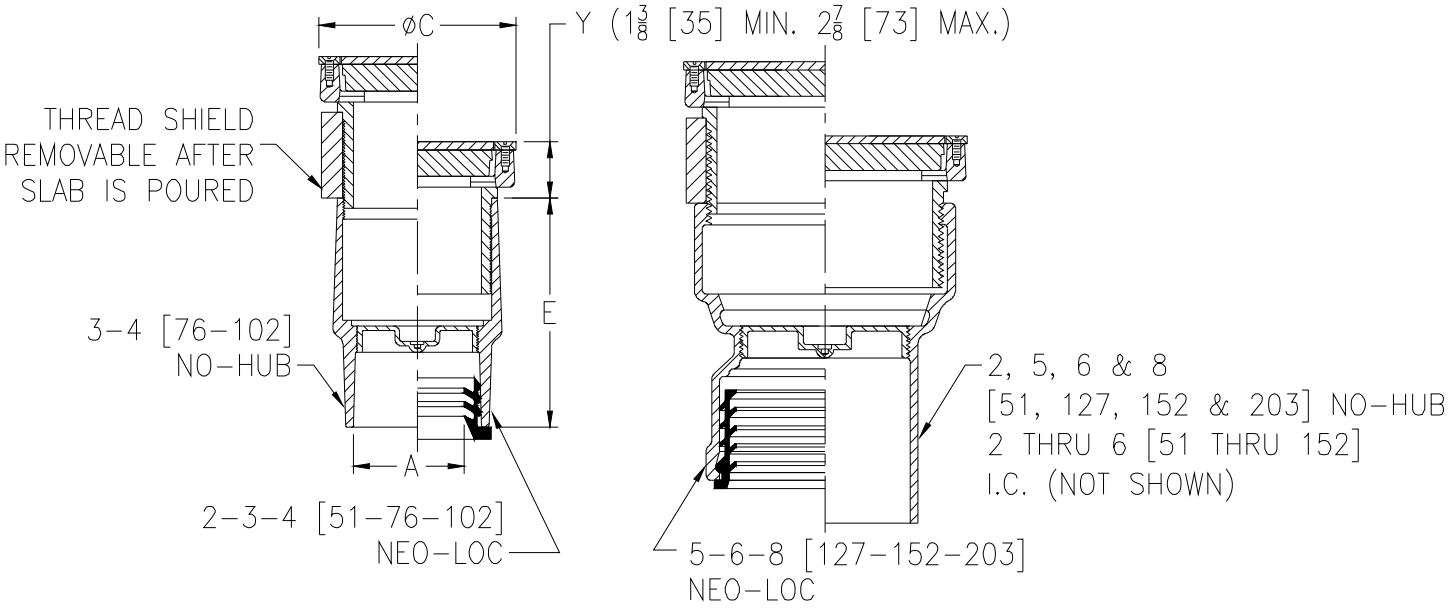

Dimensions In Inches			Approx. Wt. Lbs. [kg]
A-Pipe Size	C	E	
Inside Caulk			
2 [51]	6 1/8 [156]	6 7/8 [175]	16.1 [7]
3 [76]	6 1/8 [156]	6 7/8 [175]	15.8 [7]
4 [102]	7 1/4 [184]	6 7/8 [175]	21.3 [10]
5 [127]	8 1/4 [210]	6 7/8 [175]	24.9 [11]
6 [152]	9 1/4 [235]	6 7/8 [175]	33.7 [15]
No-Hub			
2 [51]	4 1/8 [105]	4 5/8 [117]	8.2 [4]
3 [76]	4 1/8 [105]	4 3/4 [121]	9.3 [4]
4 [102]	5 1/8 [130]	4 3/4 [121]	12.9 [6]
5 [127]	7 1/4 [184]	7 1/2 [191]	21.3 [10]
6 [152]	8 1/4 [210]	4 3/4 [121]	26.6 [12]
8 [203]	9 1/4 [235]	7 1/2 [191]	36.1 [16]
Neo-Loc			
2 [51]	4 1/8 [105]	4 3/4 [121]	9.5 [4]
3 [76]	5 1/8 [130]	4 3/4 [121]	13.2 [6]
4 [102]	5 1/8 [130]	4 3/4 [121]	14.1 [6]
5 [127]	7 1/4 [184]	6 1/2 [165]	22 [10]
6 [152]	8 1/4 [210]	5 7/8 [149]	24 [11]
8 [203]	9 1/4 [235]	6 1/2 [165]	32 [15]

ENGINEERING SPECIFICATION: ZURN ZN1400-HD "Level-Trol" Adjustable floor cleanout, Dura-Coated cast iron body, with gas and watertight ABS tapered thread plug, and round heavy-duty top adjustable to finished floor.

OPTIONS (Check/specify appropriate options)

PREFIXES

- ☐ ZB D.C.C.I. with Polished Bronze Top
- ☑ ZN D.C.C.I. with Polished Nickel Bronze Top*

SUFFIXES

- ☐ -AR Acid Resisting Epoxy Coated Finish
- ☐ -BP Bronze Plug
- ☐ -G Galvanized Cast Iron
- ☐ -K Anchor Flange
- ☐ -KC Anchor Flange with Clamp Collar
- ☐ -SG Solid Gasketed Cover
- ☐ -SM Special Marking Stamped on Top
- ☐ -T Square Top
- ☐ -TC Neo-Loc Test Cap Gasket (2-4 [51-102] NL Bottom Outlet Only)
- ☐ -VP Vandal-Proof Screws

PIPE SIZE

2 thru 6 [51 thru 152]
2 thru 6-8 [51 thru 152-203]
2 thru 6-8 [51 thru 152-203]

(Specify size/type) **OUTLET**

- ☐ IC Inside Caulk
- ☐ NH No-Hub
- ☐ NL Neo-Loc

'E' BODY HT. DIM.

See Chart
See Chart
See Chart

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. A **DATE: 6/7/10** **C.N. NO. 111232**

DWG. NO. 82442 **PRODUCT NO. ZN1400-HD**

ZURN INDUSTRIES, LLC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514
Phone: 814\455-0921 ♦ Fax: 814\454-7929 ♦ World Wide Web: www.zurn.com
In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905\405-8272 Fax: 905\405-1292

ZN1400
LIGHT-DUTY ADJUSTABLE FLOOR CLEANOUT

SPECIFICATION SHEET

TAG LIGHT DUTY FCO

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

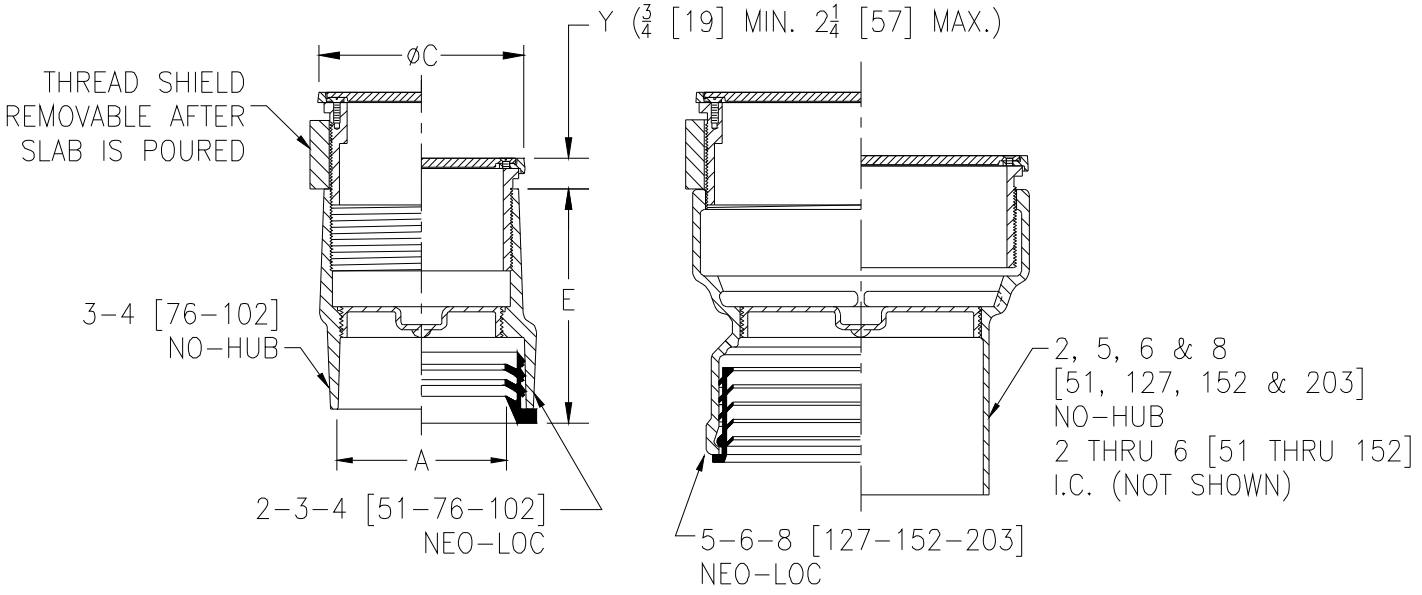

Dimensions In Inches			Approx. Wt. Lbs. [kg]
A-Pipe Size	C	E	
Inside Caulk			
2 [51]	6 1/8 [156]	6 7/8 [175]	10.9 [5]
3 [76]	6 1/8 [156]	6 7/8 [175]	10.6 [5]
4 [102]	7 1/4 [184]	6 7/8 [175]	14.1 [6]
5 [127]	8 1/4 [210]	6 7/8 [175]	16.5 [7]
6 [152]	9 1/4 [235]	6 7/8 [175]	24.4 [11]
No-Hub			
2 [51]	4 1/8 [105]	4 5/8 [117]	5.8 [3]
3 [76]	4 1/8 [105]	4 3/4 [121]	6.9 [3]
4 [102]	5 1/8 [130]	4 3/4 [121]	9.3 [4]
5 [127]	7 1/4 [184]	7 1/2 [191]	12.1 [6]
6 [152]	8 1/4 [210]	4 3/4 [121]	18.1 [8]
8 [203]	9 1/4 [235]	7 1/2 [191]	26.8 [12]
Neo-Loc			
2 [51]	4 1/8 [105]	4 3/4 [121]	7 [3]
3 [76]	5 1/8 [130]	4 3/4 [121]	9.6 [4]
4 [102]	5 1/8 [130]	4 3/4 [121]	10.5 [5]
5 [127]	7 1/4 [184]	6 1/2 [165]	15.2 [7]
6 [152]	8 1/4 [210]	5 7/8 [149]	15.5 [7]
8 [203]	9 1/4 [235]	6 1/2 [165]	23 [10]

ENGINEERING SPECIFICATION: ZURN ZN1400
"Level-Trol" Adjustable floor cleanout, Dura-Coated cast iron body, with gas and watertight ABS tapered thread plug, and round scoriated secured light-duty polished nickel bronze top, adjustable to finished floor.

OPTIONS (Check/specify appropriate options)

PREFIXES

- ☐ ZB D.C.C.I. with Polished Bronze Top
- ☑ ZN D.C.C.I. with Polished Nickel Bronze Top*

SUFFIXES

- ☐ -AR Acid Resisting Epoxy Coated Finish
- ☐ -BP Bronze Plug
- ☐ -CF Carpet Flange Cover
- ☐ -CM Carpet Marker
- ☐ -DX Round ZB or ZN Top with Dex-o-tex Flange (2 thru 4 [51 thru 102] Sizes Only)
- ☐ -G Galvanized Cast Iron
- ☐ -K Anchor Flange
- ☐ -KC Anchor Flange with Clamp Collar
- ☐ -TX Square Top recessed for 1/8 [3] tile
- ☐ -SG Solid Gasketed Cover
- ☐ -T Square Top
- ☐ -TX Square Top Recessed for 1/8 [3] Tile (Available in 2 - 6 [51-129] Tops Only)
- ☐ -VP Vandal-Proof Screws
- ☐ -X Round Top Recessed for 1/8 [3] Tile

PIPE SIZE

2 thru 6 [51 thru 152]
2 thru 6, 8 [51 thru 152, 203]
2 thru 6, 8 [51 thru 152, 203]

(Specify size/type) **OUTLET**

- ☐ IC Inside Caulk — See Chart
- ☐ NH No-Hub — See Chart
- ☐ NL Neo-Loc — See Chart

'E' BODY HT. DIM.

REV. D	DATE: 6/7/10	C.N. NO. 111230
DWG. NO. 62103		PRODUCT NO. ZN1400

ZURN INDUSTRIES, LLC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514
Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com
In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292

ZN1400-X

LIGHT-DUTY ADJUSTABLE FLOOR CLEANOUT
W/ RECESSED COVER FOR 1/8 [3] TILE

SPECIFICATION SHEET

TAG RECESSED FOR TILE

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

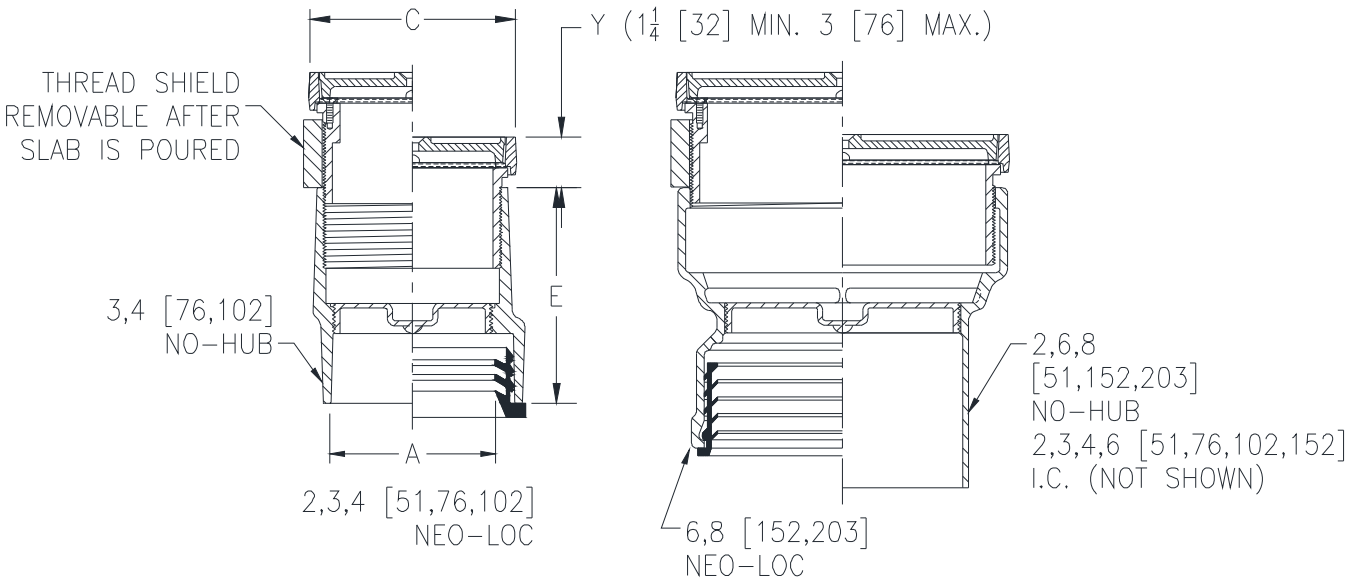

Dimensions In Inches [mm]			Approx. Wt. Lbs. [kg]
A-Pipe Size	C	E	
Inside Caulk			
2 [51]	6-1/8 [156]	6-7/8 [175]	6 [3]
3 [76]	6-1/8 [156]	6-7/8 [175]	8 [4]
4 [102]	7-1/4 [184]	6-7/8 [175]	9 [4]
6 [152]	9-1/4 [235]	6-7/8 [175]	15 [7]
No-Hub			
2 [51]	4-1/8 [105]	4-5/8 [117]	6 [3]
3 [76]	4-1/8 [105]	4-3/4 [121]	8 [4]
4 [102]	5-1/8 [130]	4-3/4 [121]	9 [4]
6 [152]	8-1/4 [210]	4-3/4 [121]	15 [7]
8 [203]	9-1/4 [235]	7-1/2 [191]	21 [10]
Neo-Loc			
2 [51]	4-1/8 [105]	4-3/4 [121]	6 [3]
3 [76]	5-1/8 [130]	4-3/4 [121]	8 [4]
4 [102]	5-1/8 [130]	4-3/4 [121]	9 [4]
6 [152]	8-1/4 [210]	5-7/8 [149]	15 [7]
8 [203]	9-1/4 [235]	6-1/2 [165]	21 [10]

ENGINEERING SPECIFICATION: ZURN ZN1400-X
"Level-Trol" Adjustable floor cleanout, Dura-Coated cast iron body, with gas and watertight ABS tapered thread plug, and round scoriated secured light-duty polished nickel bronze top recessed for 1/8" [3mm] tile, adjustable to finished floor.

OPTIONS (Check/specify appropriate options)

PREFIXES

- ☐ ZB D.C.C.I. with Polished Bronze Top
- ☑ ZN D.C.C.I. with Polished Nickel Bronze Top*

SUFFIXES

- ☐ -AR Acid Resisting Epoxy Coated Finish
- ☐ -BP Bronze Plug
- ☐ -G Galvanized Cast Iron
- ☐ -K Anchor Flange
- ☐ -KC Anchor Flange with Clamp Collar
- ☐ -VP Vandal-Proof Screws

PIPE SIZE	(Specify size/type) **OUTLET**		**'E' BODY HT. DIM.**
2,3,4,6 [51,76,102,152]	____	IC Inside Caulk	See Chart
2,3,4,6,8 [51,76,102,152,203]	____	NH No-Hub	See Chart
2,3,4,6,8 [51,76,102,152,203]	____	NL Neo-Loc	See Chart

* Regularly furnished unless otherwise specified.

Zurn Industries, LLC | **Specification Drainage Operation**
1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929
In Canada | **Zurn Industries Limited**
3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292
www.zurn.com

Rev. B
Date: 10/19/2017
C.N. No. 138989
Prod. | Dwg. No. ZN1400-X

ZN1400-T

"LEVEL-TROL" ADJUSTABLE FLOOR CLEANOUT W/ SQUARE TOP

SPECIFICATION SHEET

TAG TILED AREA

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

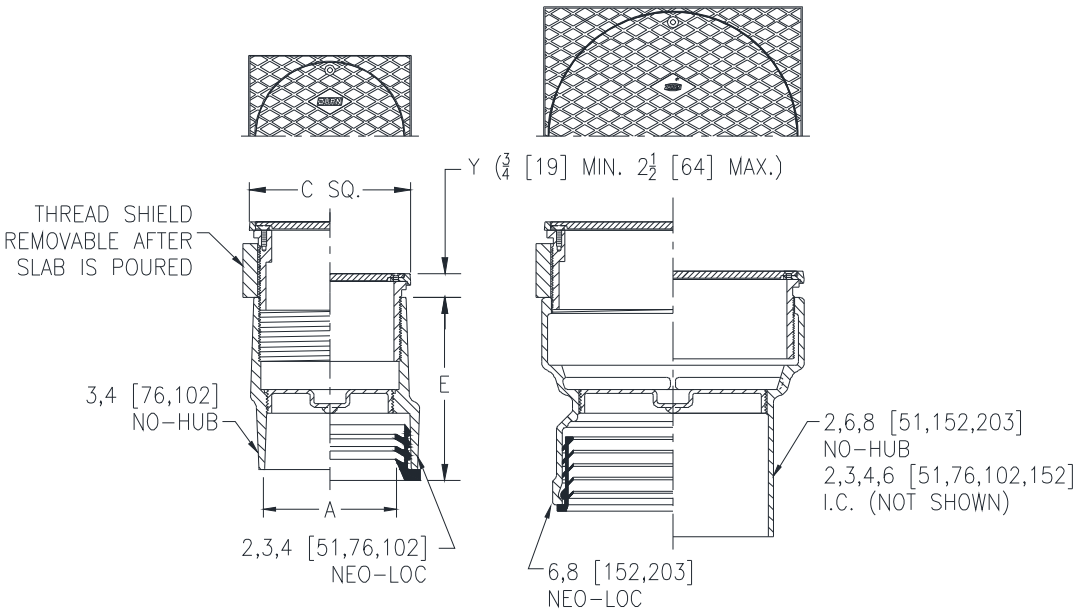

Dimensions In Inches [mm]			Approx. Wt. Lbs. [kg]
A-Pipe Size	C	E	
Inside Caulk			
2 [51]	6-1/8 [156]	6-7/8 [175]	6 [3]
3 [76]	6-1/8 [156]	6-7/8 [175]	8 [4]
4 [102]	7-1/4 [184]	6-7/8 [175]	9 [4]
6 [152]	9-1/4 [235]	6-7/8 [175]	15 [7]
No-Hub			
2 [51]	4-1/8 [105]	4-5/8 [117]	6 [3]
3 [76]	4-1/8 [105]	4-3/4 [121]	8 [4]
4 [102]	5-1/8 [130]	4-3/4 [121]	9 [4]
6 [152]	8-1/4 [210]	4-3/4 [121]	15 [7]
8 [203]	9-1/4 [235]	7-1/2 [191]	21 [10]
Neo-Loc			
2 [51]	4-1/8 [105]	4-3/4 [121]	6 [3]
3 [76]	5-1/8 [130]	4-3/4 [121]	8 [4]
4 [102]	5-1/8 [130]	4-3/4 [121]	9 [4]
6 [152]	8-1/4 [210]	6-1/2 [165]	15 [7]
8 [203]	9-1/4 [235]	6-1/2 [165]	21 [10]

ENGINEERING SPECIFICATION: ZURN ZN1400-T
"Level-Trol" Adjustable floor cleanout, Dura-Coated cast iron body, with gas and watertight ABS tapered thread plug, and square scoriated secured light-duty polished nickel bronze top, adjustable to finished floor.

OPTIONS (Check/specify appropriate options)

PREFIXES

- ☐ ZB D.C.C.I. with Polished Bronze Top
- ☑ ZN D.C.C.I. with Polished Nickel Bronze Top*

SUFFIXES

- ☐ -AR Acid Resisting Epoxy Coated Finish
- ☐ -BP Bronze Plug
- ☐ -CF Carpet Flange Cover
- ☐ -CM Carpet Marker
- ☐ -DC Duresist Cover (Only When -HD is Specified)
- ☐ -G Galvanized Cast Iron
- ☐ -HD Extra Heavy-Duty Veneer Top - Add 3/4 [19] to 'Y' Dim.
- ☐ -K Anchor Flange
- ☐ -KC Anchor Flange with Clamp Collar
- ☐ -SG Solid Gasketed Cover
- ☐ -SM Special Marking Stamped on Top
- ☐ -TC Neo-Loc Test Cap Gasket (2,3,4 [51,76,102] NL Bottom Outlet Only)
- ☐ -VP Vandal-Proof Screws

PIPE SIZE

2,3,4,6 [51,76,102,152]
2,3,4,6,8 [51,76,102,152,203]
2,3,4,6,8 [51,76,102,152,203]

(Specify size/type) **OUTLET**

____ IC Inside Caulk
____ NH No-Hub
____ NL Neo-Loc

'E' BODY HT. DIM.

See Chart
See Chart
See Chart

* Regularly furnished unless otherwise specified.

Zurn Industries, LLC | **Specification Drainage Operation**
1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929
In Canada | **Zurn Industries Limited**
3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292
www.zurn.com

Rev. B
Date: 10/20/2017
C.N. No. 138987
Prod. | Dwg. No. ZN1400-T

ZN1400-Z

"LEVEL-TROL" ADJUSTABLE CLEANOUT W/ TOP RECESSED FOR TERRAZZO

SPECIFICATION SHEET

TAG TERRAZZO AREA

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

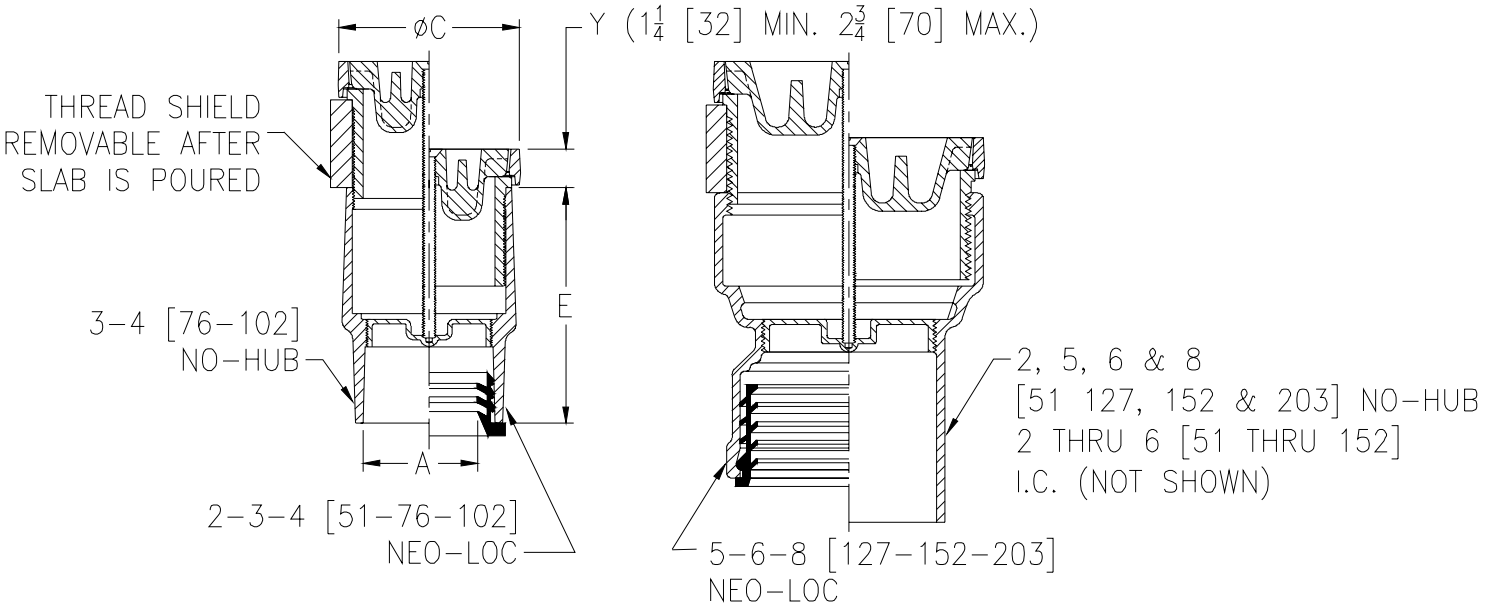

Dimensions In Inches			Approx. Wt. Lbs. [kg]
A-Pipe Size	C	E	
Inside Caulk			
2 [51]	6 1/8 [156]	6 7/8 [175]	6 [3]
3 [76]	6 1/8 [156]	6 7/8 [175]	8 [4]
4 [102]	7 1/4 [184]	6 7/8 [175]	9 [4]
5 [127]	8 1/4 [210]	6 7/8 [175]	12 [5]
6 [152]	9 1/4 [235]	6 7/8 [175]	15 [7]
No-Hub			
2 [51]	4 1/8 [105]	7 1/2 [191]	6 [3]
3 [76]	4 1/8 [105]	5 3/8 [137]	8 [4]
4 [102]	5 1/8 [130]	5 3/8 [137]	9 [4]
5 [127]	7 1/4 [184]	7 1/2 [191]	12 [5]
6 [152]	8 1/4 [210]	7 1/2 [191]	15 [7]
8 [203]	9 1/4 [235]	7 1/2 [191]	21 [10]
Neo-Loc			
2 [51]	4 1/8 [105]	5 3/8 [137]	6 [3]
3 [76]	5 1/8 [130]	5 3/8 [137]	8 [4]
4 [102]	5 1/8 [130]	5 3/8 [137]	9 [4]
5 [127]	7 1/4 [184]	6 1/2 [165]	12 [5]
6 [152]	8 1/4 [210]	6 1/2 [165]	15 [7]
8 [203]	9 1/4 [235]	6 1/2 [165]	21 [10]

ENGINEERING SPECIFICATION: ZURN ZN1400-Z
"Level-Trol" Adjustable floor cleanout, Dura-Coated cast iron body, with gas and watertight ABS tapered thread plug, and round top recessed for 1 1/4 [32] terazzo adjustable to finished floor.

OPTIONS (Check/specify appropriate options)

PREFIXES

- ☐ ZB D.C.C.I. with Polished Bronze Top
- ☑ ZN D.C.C.I. with Polished Nickel Bronze Top*

SUFFIXES

- ☐ -AR Acid Resisting Epoxy Coated Finish
- ☐ -BP Bronze Plug
- ☐ -G Galvanized Cast Iron
- ☐ -K Anchor Flange
- ☐ -KC Anchor Flange with Clamp Collar
- ☐ -SG Solid Gasketed Cover
- ☐ -VP Vandal-Proof Screws

PIPE SIZE	(Specify size/type) **OUTLET**	**'E' BODY HT. DIM.**
2 thru 6 [51 thru 152]	☐ IC Inside Caulk	See Chart
2 thru 6-8 [51 thru 152-203]	☐ NH No-Hub	See Chart
2 thru 6-8 [51 thru 152-203]	☐ NL Neo-Loc	See Chart

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. **DATE: 7/27/05** **C.N. NO. 93645**

DWG. NO. 82440 **PRODUCT NO. ZN1400-Z**

ZURN INDUSTRIES, INC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514
Phone: 814\455-0921 ♦ Fax: 814\454-7929 ♦ World Wide Web: www.zurn.com
In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905\405-8272 Fax: 905\405-1292

ZN1400-CM

"LEVEL-TROL" ADJUSTABLE FLOOR CLEANOUT W/ CARPET MARKER

SPECIFICATION SHEET

TAG CARPET AREA

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

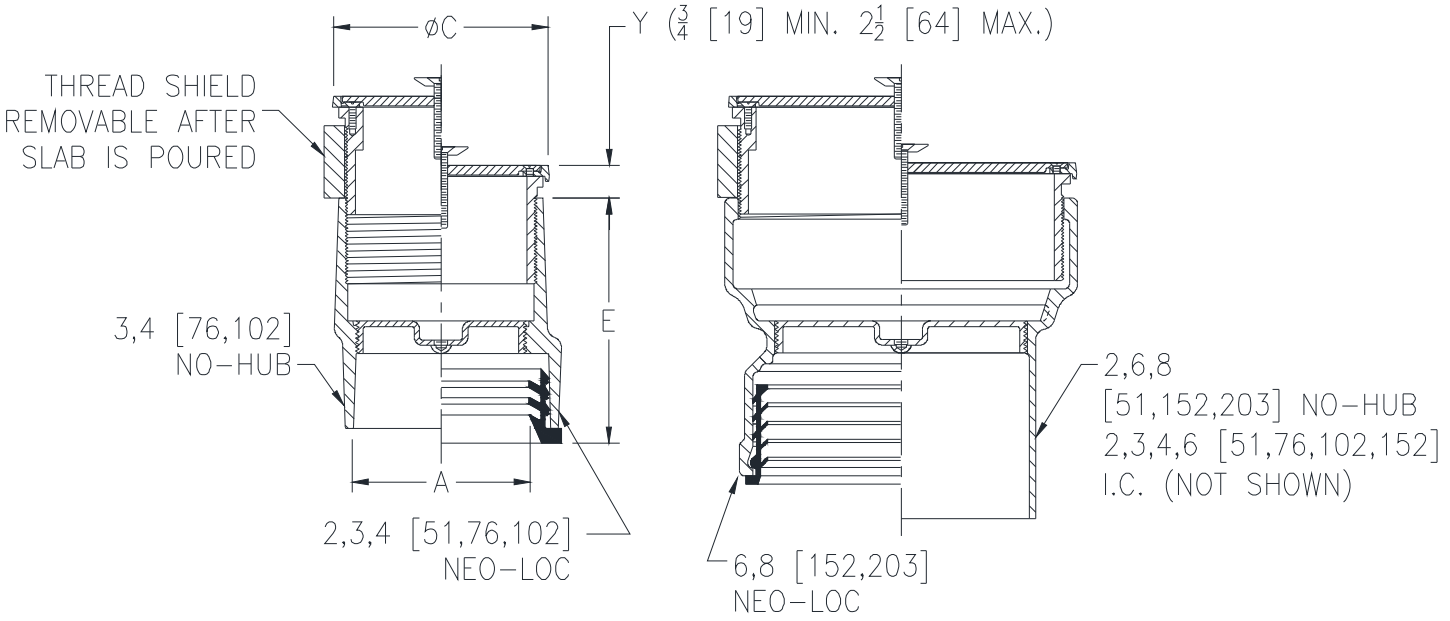

Dimensions In Inches [mm]			Approx. Wt. Lbs. [kg]
A-Pipe Size	C	E	
Inside Caulk			
2 [51]	6-1/8 [156]	6-7/8 [175]	6 [3]
3 [76]	6-1/8 [156]	6-7/8 [175]	8 [4]
4 [102]	7-1/4 [184]	6-7/8 [175]	9 [4]
6 [152]	9-1/4 [235]	6-7/8 [175]	15 [7]
No-Hub			
2 [51]	4-1/8 [105]	4-5/8 [117]	6 [3]
3 [76]	4-1/8 [105]	4-3/4 [121]	8 [4]
4 [102]	5-1/8 [130]	4-3/4 [121]	9 [4]
6 [152]	8-1/4 [210]	4-3/4 [121]	15 [7]
8 [203]	9-1/4 [235]	7-1/2 [191]	21 [10]
Neo-Loc			
2 [51]	4-1/8 [105]	4-3/4 [121]	6 [3]
3 [76]	5-1/8 [130]	4-3/4 [121]	8 [4]
4 [102]	5-1/8 [130]	4-3/4 [121]	9 [4]
6 [152]	8-1/4 [210]	5-7/8 [149]	15 [7]
8 [203]	9-1/4 [235]	6-1/2 [165]	21 [10]

ENGINEERING SPECIFICATION: ZURN ZN1400-CM "Level-Trol" Adjustable floor cleanout, Dura-Coated cast iron body, with gas and watertight ABS tapered thread plug, and round scoriated secured light-duty polished nickel bronze top with carpet marker adjustable to finished floor.

OPTIONS (Check/specify appropriate options)

PREFIXES

- ☐ Z — Dura Coated Cast Iron (Add 3/4 [19] to 'Y' Dim.)
- ☐ ZB — D.C.C.I. w/ Polished Bronze Top
- ☑ ZN — D.C.C.I. w/ Polished Nickel Bronze Top*
- ☐ ZS — D.C.C.I. w/ Polished Stainless Steel Top

SUFFIXES

- ☐ -AR — Acid Resisting Epoxy Coated Finish
- ☐ -BP — Bronze Plug
- ☐ -DX — Round ZB or ZN Top with Dex-O-Tex Flange (2,3,4 [51,76,102] Sizes Only)
- ☐ -G — Galvanized Cast Iron
- ☐ -K — Anchor Flange
- ☐ -KC — Anchor Flange with Clamp Collar
- ☐ -T — Square Top
- ☐ -TC — Neo-Loc Test Cap Gasket (2,3,4 [51,76,102] NL Bottom Outlet Only
- ☐ -VP — Vandal-Proof Screws

PIPE SIZE	(Specify size/type) **OUTLET**	**'E' BODY HT. DIM.**
2,3,4,6 [51,76,102,152]	_____ IC Inside Caulk	See Chart
2,3,4,6,8 [51,76,102,152,203]	_____ NH No-Hub	See Chart
2,3,4,6,8 [51,76,102,152,203]	_____ NL Neo-Loc	See Chart

* Regularly furnished unless otherwise specified.

Zurn Industries, LLC | **Specification Drainage Operation**
1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929
In Canada | **Zurn Industries Limited**
3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292
www.zurn.com

Rev. C
Date: 10/19/2017
C.N. No. 138984
Prod. | Dwg. No. ZN1400-CM

Z1400

EXTRA-HEAVY-DUTY "LEVEL-TROL"
ADJUSTABLE FLOOR CLEANOUT

SPECIFICATION SHEET

TAG UNFIN AREA

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

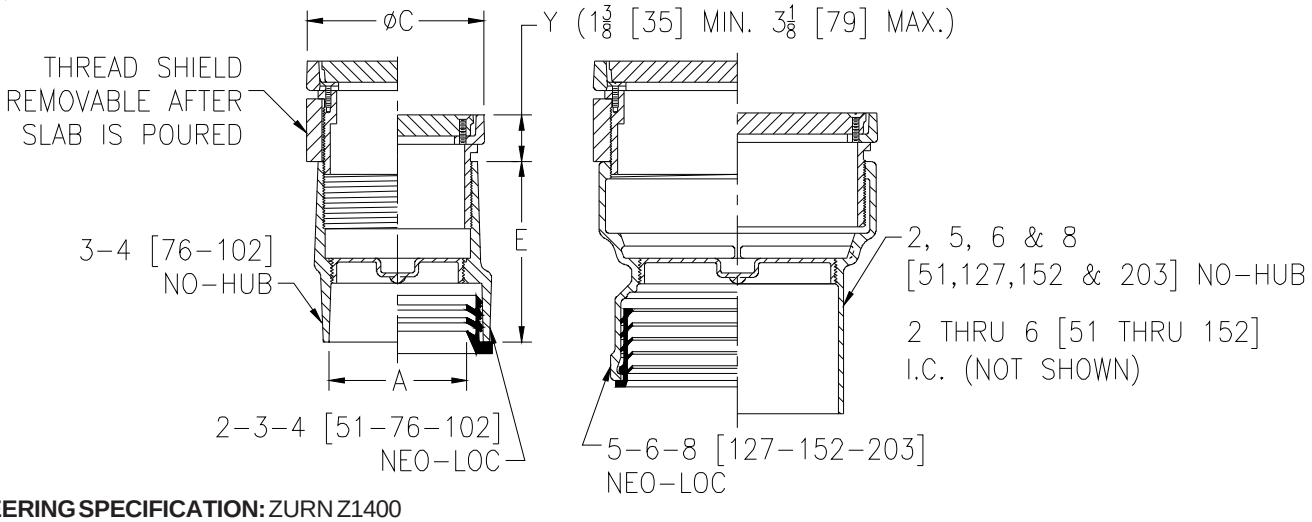

ENGINEERING SPECIFICATION: ZURN Z1400
"Level-Trol" Adjustable floor cleanout, Dura-Coated cast iron body with gas and watertight ABS tapered thread plug and round scoriated cast iron extra-heavy-duty secured top (Specify finish Z, ZB, ZN, ZS) adjustable to finished floor.

Dimension In Inches			Approx. Wt. Lbs. [kg.]
A-Pipe Size	C	E	
Inside Caulk			
2 [51]	6-1/8 [156]	6-7/8 [175]	13.8 [6.3]
3 [76]	6-1/8 [156]	6-7/8 [175]	14 [6.4]
4 [102]	7-1/4 [184]	6-7/8 [175]	18.3 [8.3]
5 [127]	8-1/4 [210]	6-7/8 [175]	22.6 [10.3]
6 [152]	9-1/4 [235]	6-7/8 [175]	32.2 [14.6]
No-Hub			
2 [51]	4-1/8 [105]	4-5/8 [117]	7 [3]
3 [76]	4-1/8 [105]	4-3/4 [121]	7.7 [3.5]
4 [102]	5-1/8 [130]	4-3/4 [121]	10.3 [4.7]
5 [127]	7-1/4 [184]	7-1/2 [191]	17.6 [8]
6 [152]	8-1/4 [210]	4-3/4 [121]	22.2 [10.1]
8 [203]	9-1/4 [235]	7-1/2 [191]	29.9 [13.6]
Neo-Loc			
2 [51]	4-1/8 [105]	4-3/4 [121]	7.9 [3.6]
3 [76]	5-1/8 [130]	4-3/4 [121]	10.6 [4.8]
4 [102]	5-1/8 [130]	4-3/4 [121]	11.9 [5.4]
5 [127]	7-1/4 [184]	6-1/2 [165]	18.7 [8.5]
6 [152]	8-1/4 [210]	5-7/8 [149]	21.9 [9.9]
8 [203]	9-1/4 [235]	6-1/2 [165]	23.5 [10.7]

OPTIONS (Check/specify appropriate options)

PREFIXES

- [✓] Z — Dura Coated Cast Iron*
- [ ] ZB — D.C.C.I. w/ Polished Bronze Light-Duty Top (Deduct 1/2 [13] from 'Y' Dim.)
- [ ] ZN — D.C.C.I. w/ Polished Nickel Bronze Light-Duty Top (Deduct 1/2 [13] from 'Y' Dim.)
- [ ] ZS — D.C.C.I. w/ Polished Stainless Steel Extra-Heavy-Duty Top (Add 3/16 [5] to 'Y' Dim.)

SUFFIXES

- [ ] -AR — Acid Resisting Epoxy Coated Finish
- [ ] -BP — Bronze Plug
- [ ] -CF — Carpet Flange Cover (ZB and ZN only)
- [ ] -CM — Carpet Marker
- [ ] -DC — Duresist Cover
- [ ] -DX — Round ZB or ZN Top with Dex-o-tex Flange (2 thru 4 [51 thru 102] Sizes only)
- [ ] -G — Galvanized Cast Iron
- [ ] -HD — Extra-Heavy-Duty Veneer Top (Add 1/8 [3] to 'Y' Dim.) (ZB and ZN only)
- [ ] -K — Anchor Flange
- [ ] -KC — Anchor Flange w/ Clamping Collar
- [ ] -PC — Protective Cover
- [ ] -SG — Solid Gasketed Cover
- [ ] -SM — Special Marking Stamped on Top
- [ ] -T — Square Top
- [ ] -TC — Neo-Loc Test Cap Gasket (2-4 [51-102] NL Bottom Outlet Only)
- [ ] -TX — Square Top Recessed for 1/8 [3] Tile (ZB and ZN only)
- [ ] -VP — Vandal-Proof Screws
- [ ] -X — Round Top Recessed for 1/8 [3] Tile (ZB or ZN only)
- [ ] -Z — Round Top Recessed for 1-1/4 [32] Terrazzo (ZB or ZN only)

PIPE SIZE	(Specify size/type) **OUTLET**	**'E' BODY HT. DIM.**
2-3-4-5-6 [51-76-102-127-152]	[ ] IC Inside Caulk	See Chart
2-3-4-5-6-8 [51-76-102-127-152-203]	[ ] NH No-Hub	See Chart
2-3-4-5-6-8 [51-76-102-127-152-203]	[ ] NL Neo-Loc	See Chart

* Regularly furnished unless otherwise specified.

Zurn Industries, LLC | **Specification Drainage Operation**
1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929

In Canada | **Zurn Industries Limited**
3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292

www.zurn.com

Rev. Q
Date: 06/04/14
C.N. No. 131071
Prod. | Dwg. No. Z1400

Z1350

NARROW WALL HYDRANT
Encased, Moderate Climate

SPECIFICATION SHEET

TAG NFHB

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

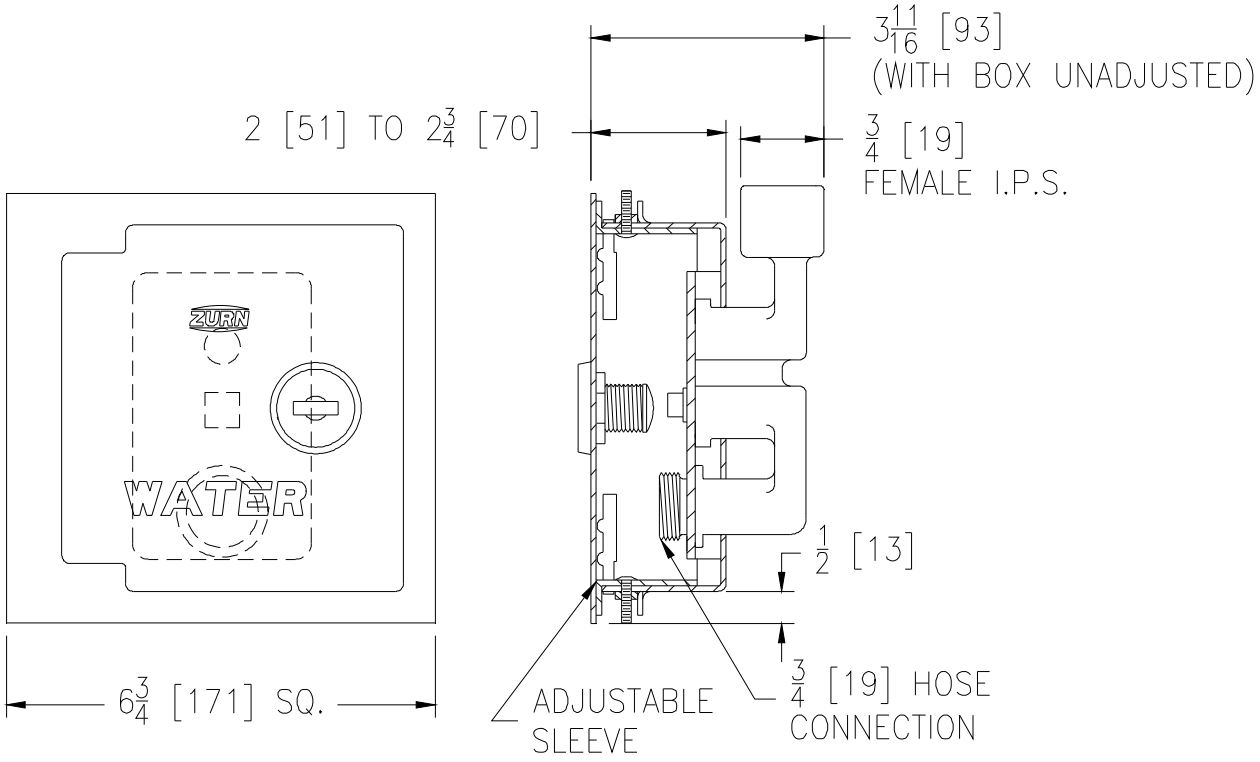

Wall Thickness Inches	Approx. Wt. Lbs. [kg]
4 [102]	4 [2]

ENGINEERING SPECIFICATION: ZURN Z1350 Encased moderate climate wall hydrant for narrow wall installation. Complete with bronze body, all bronze interior parts, replaceable seat washer, screwdriver operated stop valve in supply, key operated control valve, and 3/4 [19] IP female inlet and 3/4 [19] male hose connection standard. Adjustable stainless steel box furnished with hinged cover, cylinder lock and "WATER" stamped on cover.

OPTIONS (Check/specify appropriate options)

SUFFIXES

____	-RK	Hydrant Parts Repair Kit
____	-VB	3/4 [19] Adapter Vacuum Breaker
____	-34EL	3/4 [19] IP 90° Inlet Elbow Adapter
____	-34FS	3/4 [19] Solder Female Inlet Adapter

**NOTE: The adjustable sleeve on the stainless steel box is provided with a gasket as standard, but additional caulking of all inside joints is required (by others) after the hydrant box has been properly set. Caulking should be performed on all open seams, including the seams where the gasket is present.

REV. J DATE: 10/22/10 C.N. NO. 111945

DWG. NO. 58877 PRODUCT NO. Z1350

ZURN INDUSTRIES, LLC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514
Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com
In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292

Z125-C-E-R

8-3/8 [213] DIAMETER ROOF DRAIN W/ UNDERDECK CLAMP, STATIC EXTENSION & ROOF SUMP RECEIVER

SPECIFICATION SHEET

TAG RD

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

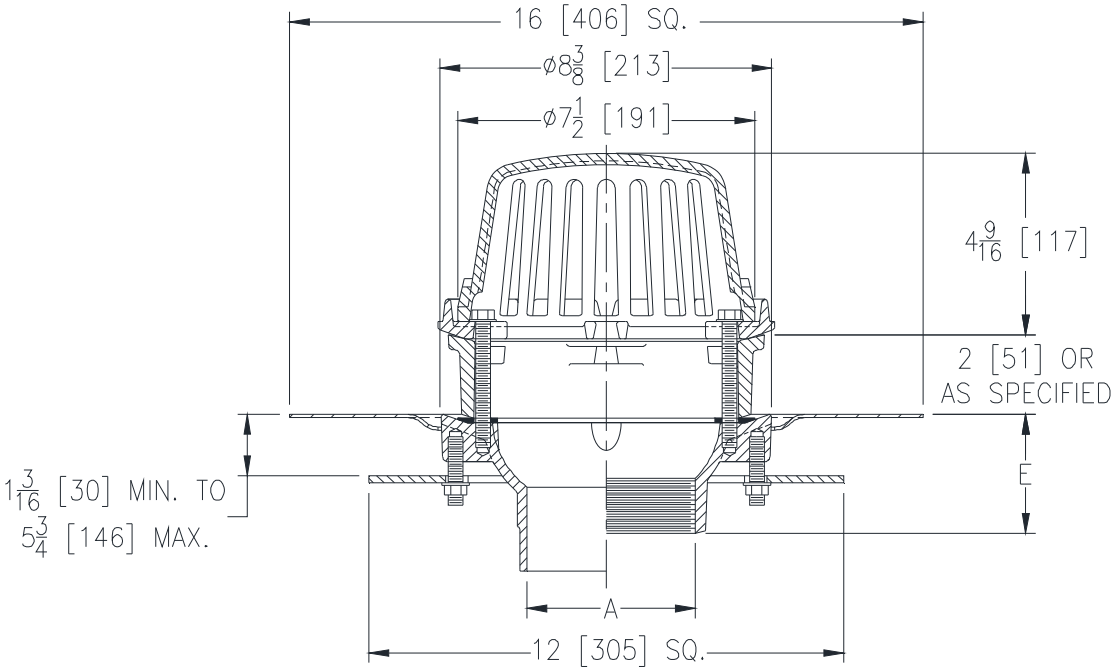

A Pipe Size In. [mm]	Approx. Wt. Lbs. [kg]	Dome Open Area Sq. In. [cm²]
2,3,4 [51,76,102]	18 [8]	43 [277]

ENGINEERING SPECIFICATION: ZURN Z125-C-E-R 8-3/8" [213mm] Diameter roof drain, Dura-Coated cast iron body with combination membrane flashing clamp/gravel guard, static extension low silhouette Poly-Dome, roof sump receiver and underdeck clamp.

OPTIONS (Check/specify appropriate options)

PIPE SIZE	(Specify size/type) **OUTLET**		**'E' BODY HT. DIM.**
2,3,4 [51,76,102]	____ IC	Inside Caulk	3-7/8 [98]
2 [51]	____ IP	Threaded	2-7/16 [62]
3 [76]	____ IP	Threaded	2-3/4 [70]
4 [102]	____ IP	Threaded	3 [76]
2,3,4 [51,76,102]	____ NH	No-Hub	4 [102]
2,3,4 [51,76,102]	____ NL	Neo-Loc	3-13/16 [97]

PREFIXES

- ☐ Z — D.C.C.I. Body with Poly-Dome (4-1/4 [108] Dome Height)*
- ☐ ZA — D.C.C.I. Body with Aluminum Dome (4-1/4 [108] Dome Height)
- ☑ ZC — D.C.C.I. Body with Low Silhouette Cast Iron Dome (4-1/4 [108] Dome Height)

SUFFIXES

- ☐ -AR — Acid Resistant Epoxy Coated Finish
- ☐ -FG — Flush Grate
- ☐ -G — Galvanized Cast Iron
- ☐ -SC — Secondary Clamping Collar
- ☐ -SS — Stainless Mesh Screen Over Dome
- ☐ -TC — Neo-Loc Test Cap Gasket (2,3,4 [51,76,102] NL Bottom Outlet Only)
- ☐ -VP — Vandal-Proof Secured Top
- ☐ -XJ — Vertical Expansion Joint (See Z190)
- ☐ -84 — Stainless Steel Perforated Gravel Guard
- ☐ -85 — Stainless Steel Perforated Extension
- ☐ -89 — 2 [51] High External Water Dam
- ☐ -90 — 90º Threaded Side Outlet Body (2,3,4 [51,76,102])

* Regularly furnished unless otherwise specified.

Zurn Industries, LLC | **Specification Drainage Operation**
1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929
In Canada | **Zurn Industries Limited**
3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292
www.zurn.com

Rev. G
Date: 10/03/2017
C.N. No. 138273
Prod. | Dwg. No. Z125-C-E-R

Z187

6 X 7 [152 X 178] OR 8 X 12 [203 X 305]
OBLIQUE SCUPPER DRAIN

SPECIFICATION SHEET

TAG SCD

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

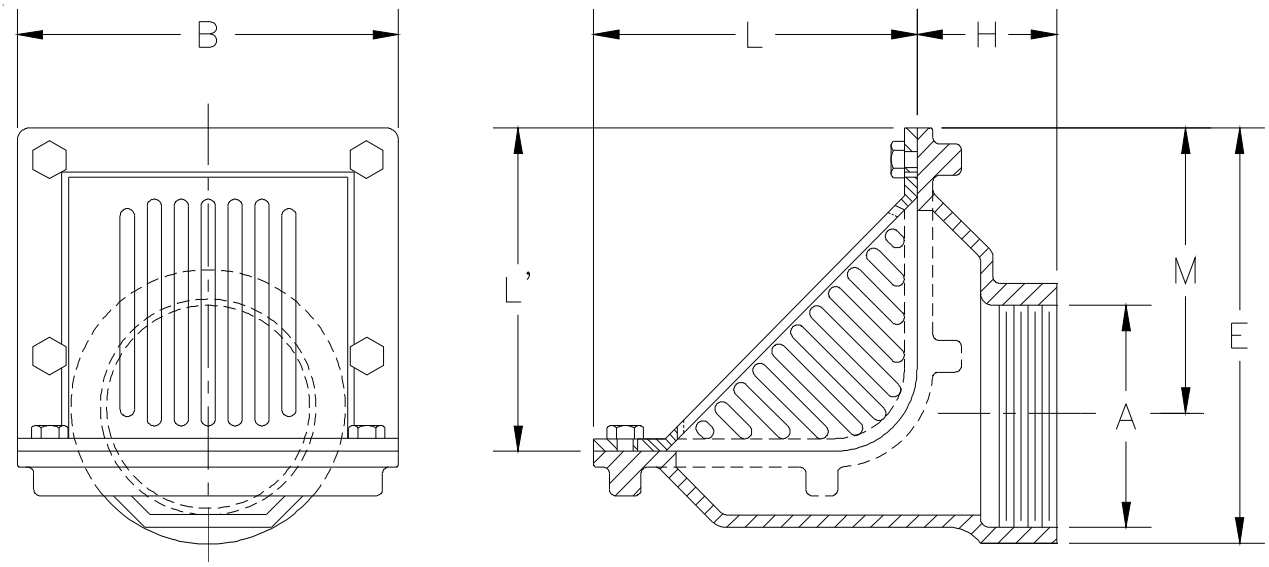

A-Pipe Size Inches	Dimensions In Inches [mm]					Approx. Wt. Lbs. [kg]	Grate Open Area Sq. In. [cm²]
	B	H	L	L'	M		
2 [51]	7-1/2 [191]	2-3/4 [70]	6-3/8 [162]	6-3/8 [162]	6-11/16 [170]	22 [10]	57 [368]
3 [76]					6-5/32 [156]	20 [9]	
4 [102]					5-5/8 [143]	20 [9]	
6 [152]	12-1/2 [318]	3-1/2 [89]	8-3/8 [213]	8-3/8 [213]	7-3/8 [200]	32 [15]	57 [368]
8 [203]	12-1/2 [318]	3-1/2 [89]	8-3/8 [213]	8-3/8 [213]	6-3/8 [187]	33 [15]	57 [368]

ENGINEERING SPECIFICATION: ZURN Z187
6 x 7 [152 x 178] or 8 x 12 [203 x 305] Scupper drain, Dura-Coated cast iron body with reversible back or bottom outlet, oblique aluminum grate with 90° combination frame and membrane flashing clamp.

OPTIONS (Check/specify appropriate options)

PIPE SIZE	(Specify size/type) **OUTLET**	**'E' BODY HT. DIM.**
2, 3, 4	____ IP Threaded	8-3/16 [208]
6, 8 [51 thru 102, 150, 203]	____ IP Threaded	11 [279]
2, 3, 4	____ NH No-Hub (IP w/Z1040)	8-3/16 [208]
6, 8 [51 thru 102, 150, 203]	____ NH No-Hub (IP w/Z1040)	11 [279]

PREFIXES

- ☑ Z D.C.C.I. Body with Grate*
- ☐ ZB D.C.C.I. Body with Polished Bronze Grate
- ☐ ZN D.C.C.I. Body with Polished Nickel Bronze Grate
- ☐ ZRB D.C.C.I. Body with Plain Bronze Grate

SUFFIXES

- ☐ -BS Bronze Mesh Screen Over Grate
- ☐ -DA Downspout Adapter (Previously Z188) (2 [51] thru 4 [102], 6 [152] only)
- ☐ -FG Flush Grate
- ☐ -G Galvanized Cast Iron
- ☐ -TS Secured Top
- ☐ -VP Vandal Proof Secured Top

* Regularly furnished unless otherwise specified.

Zurn Industries, LLC | **Specification Drainage Operation**
1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929
In Canada | **Zurn Industries Limited**
3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292
www.zurn.com

Rev. G
Date: 03/14/14
C.N. No. 130672
Prod. | Dwg. No. Z187

Z1020XL
ELECTRONIC TRAP PRIMER

SPECIFICATION SHEET

TAG TSP

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

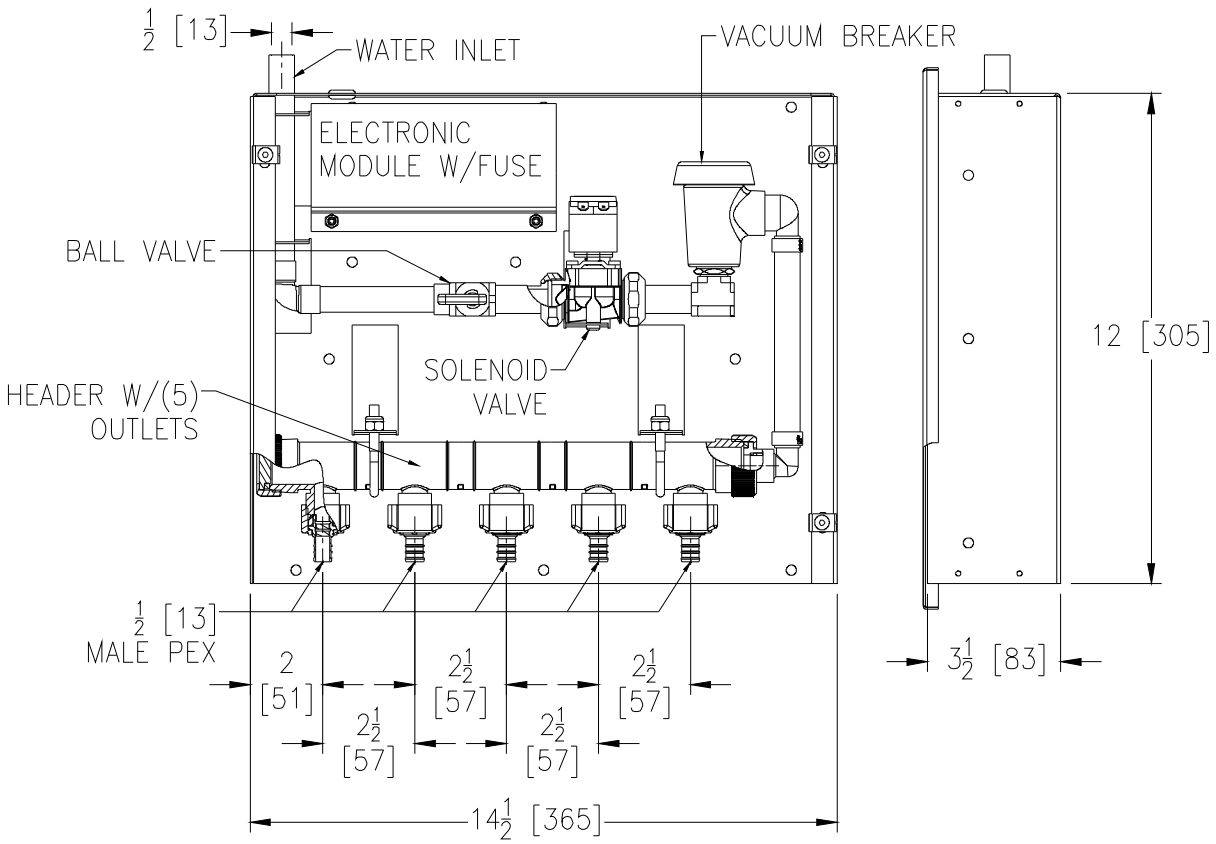

Approx. Wt. Lbs. [kg]
12 [5]

ENGINEERING SPECIFICATION: ZURN Z1020XL
Factory programmed, 5-port, Lead-Free Electronic Trap Primer providing a six second water injection to traps every twenty-four hours*. Trap primer features a galvanized steel combination surface or recessed housing and cover, 1/2 [13] solder copper inlet connection, brass ball-type stop valve, slow closing 24 VAC solenoid valve with integral strainer, 120 - 24 VAC transformer, brass atmospheric vacuum breaker, PEX waterway, and anti-scaling multi-port manifold with five 1/ 2 [13] Male PEX outlet connections.

Zurn "XL" Lead-Free compliant products are a line of durable plumbing products designed and manufactured to comply with state laws and local codes that mandate maximum allowable lead content levels. Zurn "XL" products are manufactured in accordance to the Federal SWDA section 1417.

OPTIONS (Check/specify appropriate options)

SUFFIXES

____ -CW Copper Waterway (with 1/2 [13] Female I.P.S. Connection)
____ -DU4 Additional Distribution Units with Copper Waterway (Specify Quantity) (Contact Zurn for Sizing Specifications)
____ -VP Vandal-Proof Secured Cover with Vandal-Proof Driver
____ -10 Ten Outlets

Min. Pressure: 3 psi
Working Pressure: 20 to 100 psig
Default Settings:
-Frequency: 24 hours
-Injection Time: 6 seconds.
-Volume: 2 oz. min. per port

* Regularly furnished unless otherwise specified. Alternate flow settings available upon request.

Zurn Industries, LLC | **Specification Drainage Operation**
1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929
In Canada | **Zurn Industries Limited**
3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292
www.zurn.com

Rev. -
Date: 5/5/15
C.N. No. 132620
Prod. | Dwg. No. Z1020XL

Z1333XL

ECOLOTROL CERAMIC DISC WALL HYDRANT

Exposed, Anti-Siphon, Automatic Draining, Moderate Climate

SPECIFICATION SHEET

TAG INTERIOR HB

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

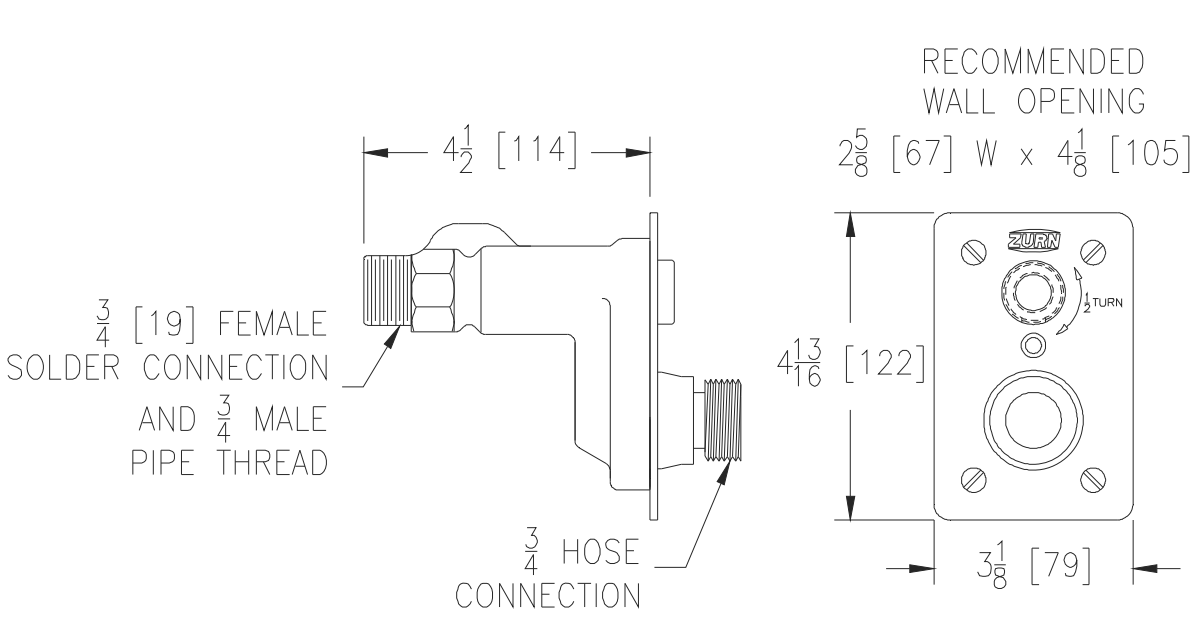

Wall Thickness in [mm]	Approx. Wt. lbs [kg]
6 [152]	3 [1]

ENGINEERING SPECIFICATION: ZURN Z1333XL

Exposed, Ecolotrol™, lead-free, anti-siphon, moderate / interior wall hydrant for flush installation. Hydrant features integral backflow preventer with anti-siphon technology, all-bronze interior components with 1/2 turn long-life ceramic disc cartridge, combination 3/4" [19mm] female solder and 3/4" male pipe thread inlet connection, and 3/4" male hose connection. Hydrant furnished with type 304 stainless steel faceplate and includes operating key.

Zurn "XL" Lead-Free compliant products are a line of durable plumbing products designed and manufactured to comply with state laws and local codes that mandate maximum allowable lead content levels. Zurn "XL" products are manufactured in accordance to the Federal SWDA section 1417.

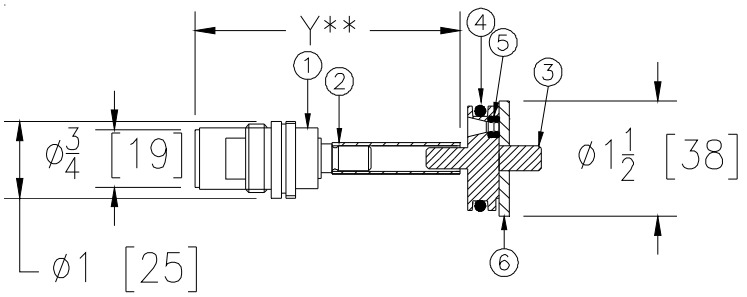

OPTIONS (Check/specify appropriate options)

SUFFIXES

____ -PB Polished Bronze Face

____ -RK Hydrant Parts Repair Kit (HYD-RK-Z1321XL/33XL)

____ -RT12 Ceramic Cartridge Removal Tool (up to 12 [305] wall)

Internal Components

Item	Name	Quan.
1	Ceramic Cartridge	1
2	Operating Tube	1
3	Operating Coupling	1
4	O-Ring	1
5	O-Ring	1
6	Retaining Washer	1

* Regularly furnished unless otherwise specified.

** When ordering replacement cartridge assembly Specify Y dim.

Zurn Industries, LLC | **Specification Drainage Operation**
1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929
In Canada | **Zurn Industries Limited**
3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292
www.zurn.com

Rev. B
Date: 09/28/2017
C.N. No. 138012
Prod. | Dwg. No. Z1333XL

Z1341XL
WALL FAUCET

SPECIFICATION SHEET

TAG HB

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

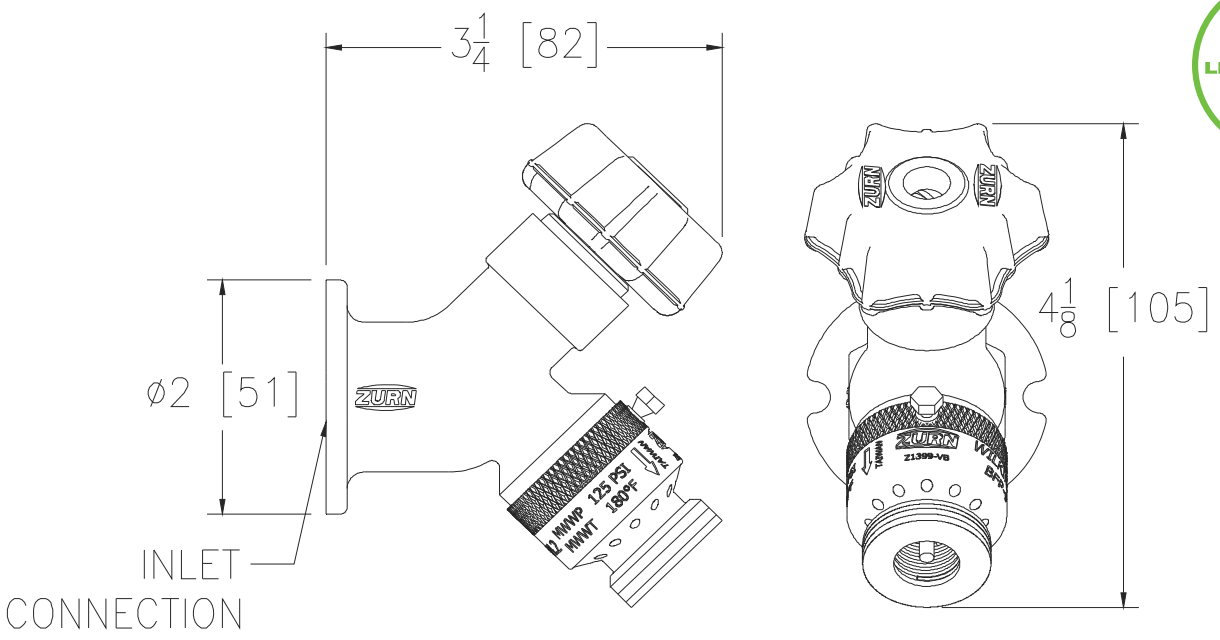

-P12 and -P34 Inlet Connection Shown

Inlet Connection	Inlet Description in [mm]	Approx. Wt. lbs [kg]
__ -C12	1/2 [13] Solder x 3/4 [19] Solder	2 [1]
__ -C12-PX	1/2 [13] PEX	2 [1]
__ -CP12	1/2 [13] Solder x 1/2 [13] MPT	2 [1]
__ -P12	1/2 [13] FPT	2 [1]
__ -P34	3/4 [19] FPT	2 [1]

OPTIONS (Check/specify appropriate options)

SUFFIXES

____ -PB Polished Bronze Finish
____ -PC Polished Chrome Finish
____ -RC Rough Chrome Finish
____ -RK Hydrant Parts Repair Kit

ENGINEERING SPECIFICATION: ZURN Z1341XL Exposed, lead-free, anti-siphon, moderate climate wall hydrant for residential and light commercial applications. Hydrant features Z1399-VB external vacuum breaker with 3/4" [19] male hose connection, bronze and stainless steel interior components, vandal resistant operating stem, and secured wheel-type handle. Hydrant is finished with rough bronze exterior with a choice of five different inlet connection options and includes an optional loose key.

Zurn "XL" Lead-Free compliant products are a line of durable plumbing products designed and manufactured to comply with state laws and local codes that mandate maximum allowable lead content levels. Zurn "XL" products are manufactured in accordance to the Federal SWDA section 1417.

* Regularly furnished unless otherwise specified.

Zurn Industries, LLC | **Specification Drainage Operation**
1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929
In Canada | **Zurn Industries Limited**
3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292
www.zurn.com

Rev. -
Date: 3/23/15
C.N. No. 131803
Prod. | Dwg. No. Z1341XL

SERVICE SINK FAUCET
Z841L1-RC

TAG HB _____

Engineering Specifications: Zurn AquaSpec® Z841L1-RC
Rough chrome-plated cast brass service sink faucet with quarter turn ceramic disc cartridges, 2-1/2" [64mm] long swivel inlets (with integral stops) providing adjustable centers from 4" [102mm] to 8-3/8" [213mm] and a 2-1/2" [64mm] vacuum breaker spout with pail hook and an integral 3/4" [19mm] hose-threaded outlet. Unit is provided with 2-1/2" [64mm] vandal-resistant color-coded brass lever handles.

ADA DESIGNED

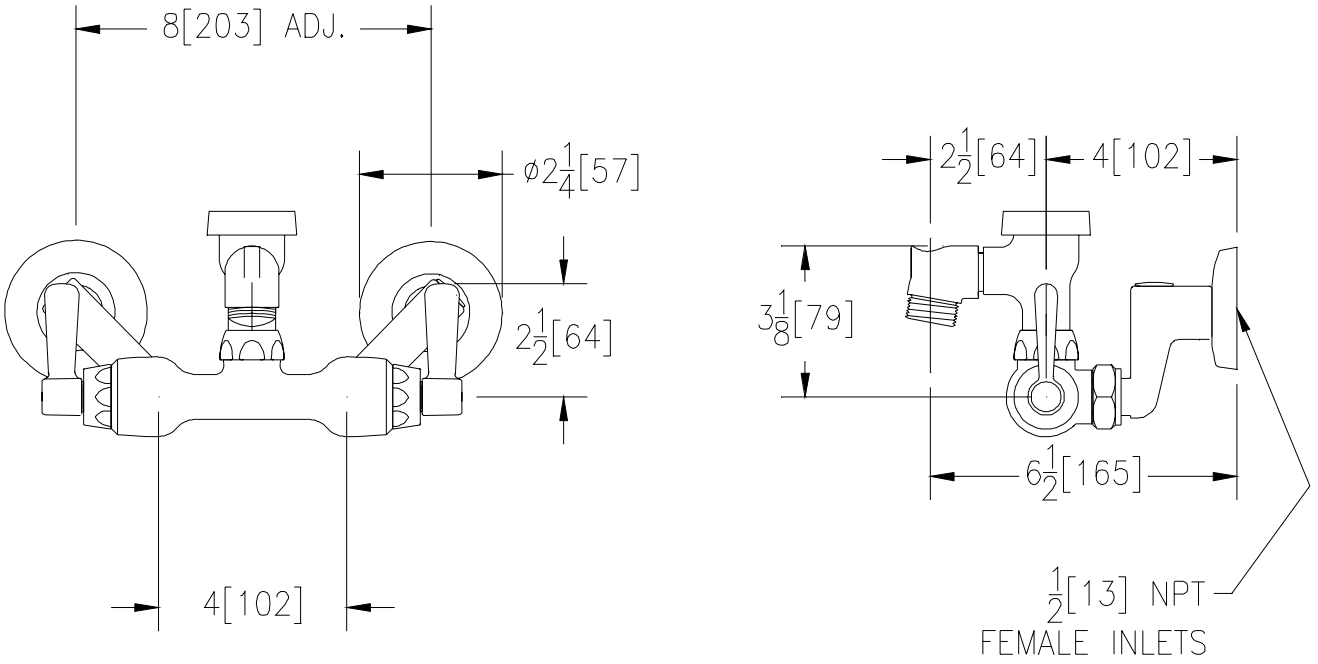

Note: *All dimensions are for reference only. Do not use for pre-plumbing*

OPTIONAL ACCESSORIES

Suffix	Description
__ -SSI	3/8" [10mm] Short Swivel Inlets
__ -WHK	Wall Hook
__ -5H	5' [152cm] Vinyl Hose

ZURN INDUSTRIES, INC. ♦ COMMERCIAL BRASS OPERATION ♦ 2640 SOUTH WORK STREET ♦ FALCONER NY 14733
Phone: 1-716-665-1132 ♦ Fax: 1-716-665-1135 ♦ World Wide Web: www.zurn.com
In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292

AquaSpec® is a registered trademark of Zurn Industries, Inc.
©2004 Zurn Industries, Inc.

Rev. G Date: 7/20/04 C.N. No. 100959
Dwg. No. 60885 Product No. Z841L1-RC

Z1320XL

ECOLOTROL CERAMIC DISC WALL HYDRANT

Encased, Non-Freeze, Anti-Siphon, Automatic Draining

SPECIFICATION SHEET

TAG EXT NFHB

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

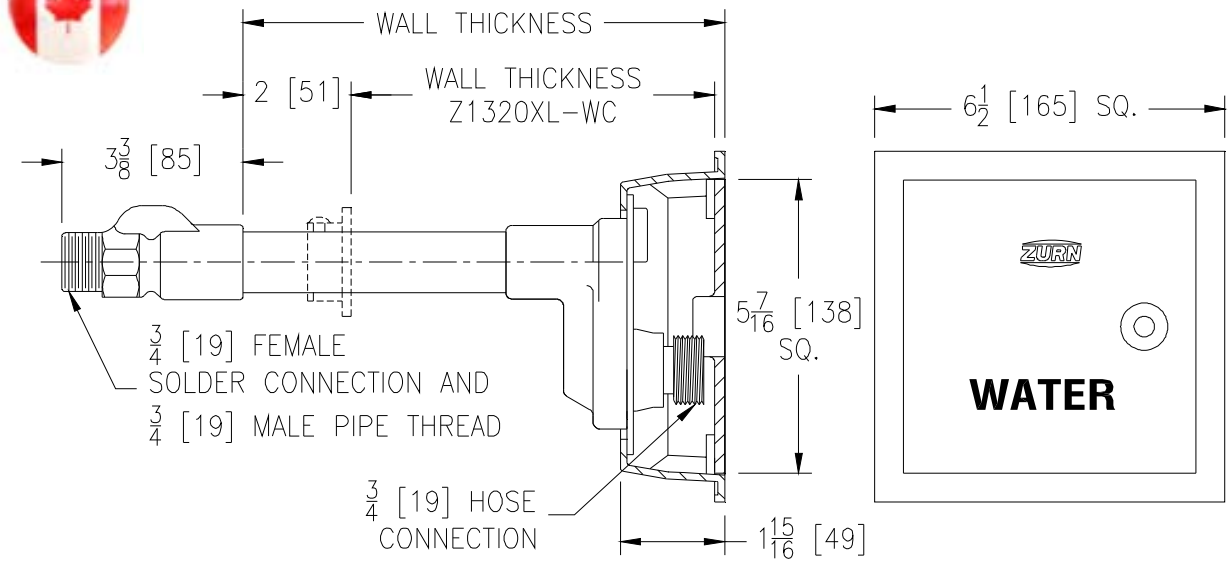

Wall Thickness in [mm]	Approx. Wt. lbs [kg]
6, 8 [152, 203]	8 [4]
10, 12,14 [254, 305, 356]	9 [4]
16, 18 [406, 457]	10 [5]
20, 22, 24 [508, 559, 610]	11 [5]
26, 30 [660, 762]	13 [6]

ENGINEERING SPECIFICATION: ZURN Z1320XL
Encased, Ecolotrol™, lead-free, non-freeze automatic draining wall hydrant for flush installation. Hydrant features integral backflow preventer with anti-siphon technology, copper casing, all-bronze interior components with 1/2 turn long-life ceramic disc cartridge, combination 3/4" [19] female solder and 3/4" [19] male pipe thread inlet connection, and 3/4" [19] male hose connection. Hydrant furnished with nickel bronze housing with locking hinged cover stamped “WATER” and includes operating key.

Zurn “XL” Lead-Free compliant products are a line of durable plumbing products designed and manufactured to comply with state laws and local codes that mandate maximum allowable lead content levels. Zurn “XL” products are manufactured in accordance to the Federal SWDA section 1417.

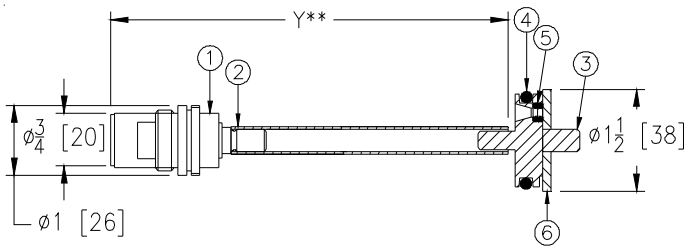

OPTIONS (Check/specify appropriate options)

SUFFIXES

____	-CL	Cylinder Lock
____	-PB	Polished Bronze Face
____	-RK	Hydrant Parts Repair Kit (HYD-RK-Z1321XL-33XL)
____	-RT12	Ceramic Cartridge Removal Tool (Up to 12 [305] Wall)
____	-RT24	Ceramic Cartridge Removal Tool (Up to 24 [610] Wall)
____	-RT36	Ceramic Cartridge Removal Tool (Up to 36 [915] Wall)
____	-WC	Wall Clamp
____	-34EL	3/4 [19] 90° Solder Inlet Elbow
____	-34FIP	3/4 [19] IP Straight Female Inlet Adapter

Internal Components

Item	Name	Quan.
1	Ceramic Cartridge	1
2	Operating Tube	1
3	Operating Coupling	1
4	O-Ring	1
5	O-Ring	1
6	Retaining Washer	1

* Regularly furnished unless otherwise specified.

** When ordering replacement cartridge assembly Specify Y dim.

Zurn Industries, LLC | **Specification Drainage Operation**
1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929
In Canada | **Zurn Industries Limited**
3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292
www.zurn.com

Rev. A
Date: 8/2815
C.N. No. 133098
Prod. | Dwg. No. Z1320XL

Z1700

SHOKTROL WATER HAMMER ARRESTORS

SPECIFICATION SHEET

TAG WHA_____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

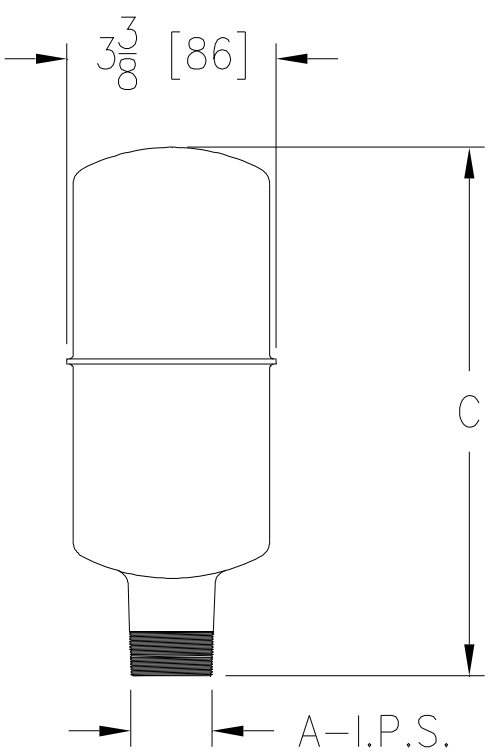

Size	A Inches	C	Approx. Wt. Lbs. [kg]	Fixture Unit Capacity
100	3/4 [19]	3-1/2 [90]	1 [.5]	1-11
200	3/4 [19]	3-1/2 [90]	1-1/2 [.7]	12-32
300	1 [25]	4-1/2 [114]	1-3/4 [.8]	33-60
400	1 [25]	6-5/8 [168]	2-3/4 [1.2]	61-113
500	1 [25]	7-1/2 [191]	3-1/4 [1.5]	114-154
600	1 [25]	8-1/2 [216]	3-3/4 [1.7]	155-330

ENGINEERING SPECIFICATION: ZURN Z1700
Shoktrol Water Hammer Arrestors are regularly furnished in all stainless steel construction. Pipe threads are accurately machined to assure tight connection. 3/4 [19] male I.P.S. inlet is standard for the 100 and 200 size units, while 1 [25] male I.P.S. inlet is standard for sizes 300 thru 600.

All sizes of Zurn Z1700 Shoktrol Water Hammer Arrestors comply with the following specifications:

PDI WH-201
ANSI A112.26.1M
ASSE 1010

Where required in piping systems, properly sized water hammer arrestors shall be ZURN Z1700 (specify size) with nesting type bellows contained within a casing having sufficient displacement volume to dissipate the calculated kinetic energy generated, in the piping system. Both casing and bellows constructed of Type 304 stainless steel.

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. C DATE: 11/15/10 C.N. NO. 120379

DWG. NO. 59412 PRODUCT NO. Z1700

ZURN INDUSTRIES, LLC ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514
Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com
In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292

Z1440

CLEANOUT FERRULE WITH PLUG

SPECIFICATION SHEET

TAG LINE CO

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

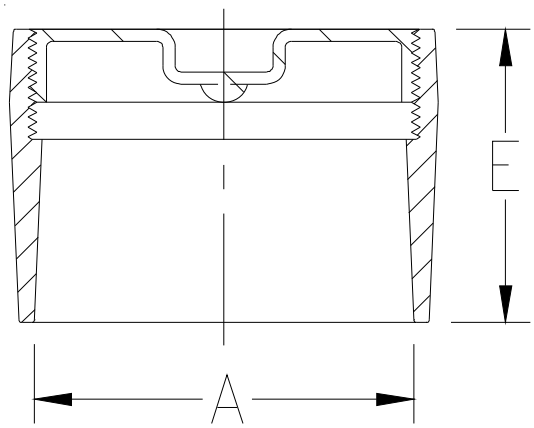

Dimensions In Inches[mm]		Approx. Wt. Lbs. [kg]
A-Pipe Size	E	
2 [51]	2-1/2 [64]	2 [1]
3 [76]	2-3/4 [70]	4 [2]
4 [102]	3 [76]	5 [2]
6 [152]	3 [76]	8 [4]
8 [203]	3-1/2 [89]	13 [6]

ENGINEERING SPECIFICATION: ZURN Z1440
Cleanout with Dura-Coated cast iron body, with gas and watertight ABS tapered thread plug.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

2 ,3,4,6,8, [51,76,102,152,203]

(Specify size) **OUTLET**

____ NH No-Hub

'E' BODY HT. DIM.

See Chart

PREFIXES

☑ Z Dura-Coated Cast Iron Body and ABS Plug*

SUFFIXES

☐ -A Raised Head Plug
☑ -BP Bronze Plug
☐ -G Galvanized Cast Iron

* Regularly furnished unless otherwise specified.

Zurn Industries, LLC | **Specification Drainage Operation**
1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929
In Canada | **Zurn Industries Limited**
3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292
www.zurn.com

Rev. F
Date: 09/28/2017
C.N. No. 138022
Prod. | Dwg. No. Z1440

Z1445
CLEANOUT TEE

SPECIFICATION SHEET

TAG STACK CO

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

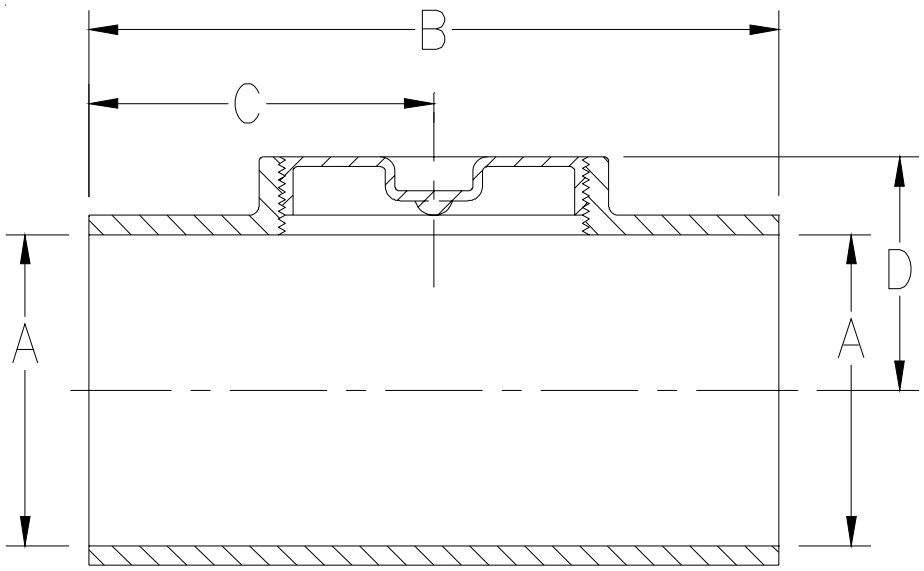

A- Pipe Size	Dimensions In Inches						Approx. Wt. Lbs. [kg]
	NH			HB X SP			
	B	C	D	B	C	D	
2 [51]	6-3/8 [162]	3-3/16 [81]	1-3/4 [44]	10 [254]	4-1/2 [114]	2-3/4 [70]	8 [4]
3 [76]	7-3/4 [197]	3-7/8 [98]	2-1/2 [64]	12 [305]	5-3/4 [146]	3 [76]	15 [7]
4 [102]	8-7/8 [225]	4-7/16 [113]	3 [76]	12 [305]	5-3/4 [146]	3-1/2 [89]	16 [7]
5 [127]	——	——	——	13 [330]	6-1/4 [159]	4 [102]	22 [10]
6 [152]	12-1/2 [318]	6-1/4 [159]	4-5/16 [110]	14 [356]	6-3/4 [171]	4-1/2 [114]	35 [16]
8 [203]	17 [432]	8-1/2 [216]	6-3/8 [162]	17 [432]	8-1/4 [210]	5-1/2 [140]	49 [22]

ENGINEERING SPECIFICATION: ZURN Z1445
Cleanout Tee. Dura-Coated cast iron body with gas and watertight ABS tapered thread plug.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

2 thru 4-6-8 [51 thru 102-152-203]
2 thru 6-8 [51 thru 152-203]

(Specify size/type) **OUTLET**

☐ NH No-Hub
☐ HB X SP Hub x Spigot

PREFIXES

☑ Z Dura-Coated Cast Iron*

SUFFIXES

☐ -A Raised Head Plug
☑ -BP Bronze Plug
☐ -G Galvanized Cast Iron

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. D **DATE: 11/04/10** **C.N. NO. 120250**

DWG. NO. 58766 **PRODUCT NO. Z1445**

ZURN INDUSTRIES, LLC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514
Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com
In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292

Z1666-1
URINAL CLEANOUT

SPECIFICATION SHEET

TAG URINAL CO

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

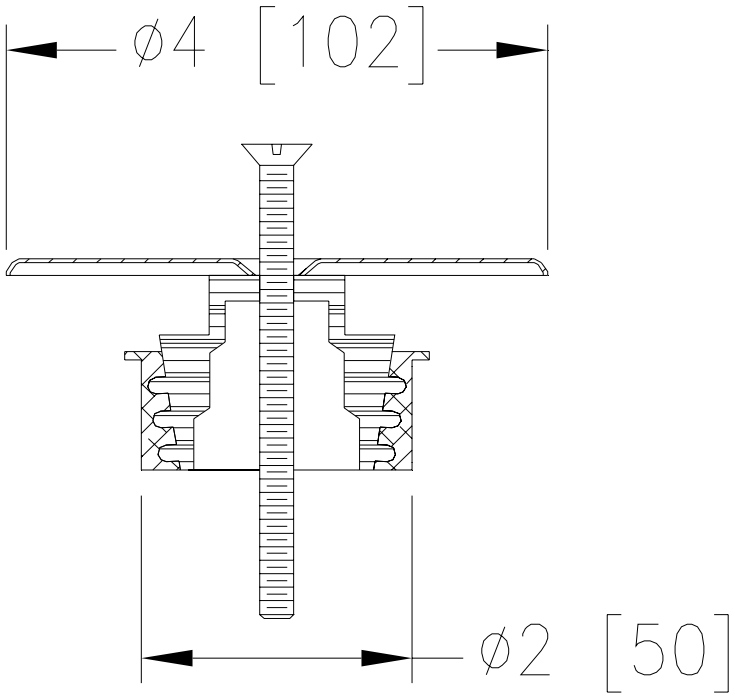

Pipe Size	Approx. Wt. Lbs. [kg]
1-1/2, 2 [38, 51]	2 [1]

ENGINEERING SPECIFICATION: ZURN Z1666-1
Urinal Cleanout with 4 [102] diameter stainless steel access cover, centre securing screw, complete with 1-1/2 [38] or 2 [51] expandable plug.

OPTIONS (Check/specify appropriate options)

SUFFIXES

- ☑ -VP Vandal-Proof Screws
- ☐ -7 7 [178] Stainless Steel Access Cover
- ☐ -9 9 [229] Stainless Steel Access Cover

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. A	**DATE: 3/30/09**	**C.N. NO. 99855**	
DWG. NO. 63654	**PRODUCT NO. Z1666-1**		

ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V 1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292
In the U.S.: ZURN INDUSTRIES, LLC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514
Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com

ZN-1602
ADJUSTABLE ROUND MEDIUM-DUTY NICKEL BRONZE CLEANOUT

SPECIFICATION SHEET

TAG FCO

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

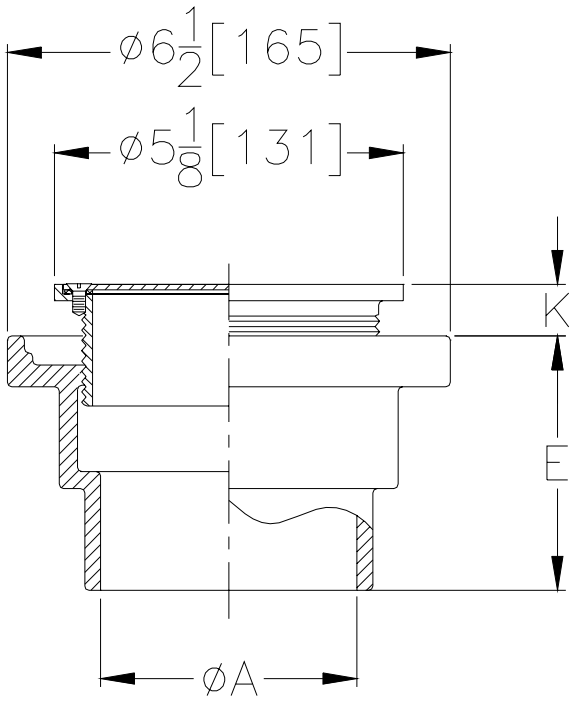

Pipe Size Inches / [mm]	Approx. Wt. Lbs. / [kg]	K	
		Min.	Max.
2-3-4 [51-76-102]	6 [3]	1/2 [13]	1-3/8 [35]

ENGINEERING SPECIFICATION: ZURN ZN-1602 Adjustable Floor Cleanout, Dura-Coated cast iron body with neoprene body sleeve, polished nickel bronze adjustable head and gasketed, secured, scoriated cover with stainless steel screws.

OPTIONS (Check/specify appropriate options)

PIPE SIZE
2,3,4 [51,76,102]

(Specify size/type) **OUTLET**
____ NH No-Hub

E BODY HT. DIM.
3-3/4" [95mm]

PREFIXES
____ ZX- Heavy-Duty Cast Iron Top

SUFFIXES
____ -CM Carpet Marker
____ -G Galvanized
✓ -SP Seal Plug
____ -T Square Top
____ -TX Square Top Recessed 1/8" [3mm] Tile (Formerly ZN-1614)
____ -VP Vandal-Proof Screws
____ -X Round Top Recessed 1/8" [3mm] Tile (Formerly ZN-1608)
____ -1600 Wide Flange Body

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. B DATE: 06/16/05 C.N. NO. 89833

DWG. NO. 65129 PRODUCT NO. ZN-1602

ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V 1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292
In the U.S.: ZURN INDUSTRIES, INC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514
Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com

ZX415-A

BODY ASSEMBLY
WITH "TYPE A" STRAINER

SPECIFICATION SHEET

TAG FD

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

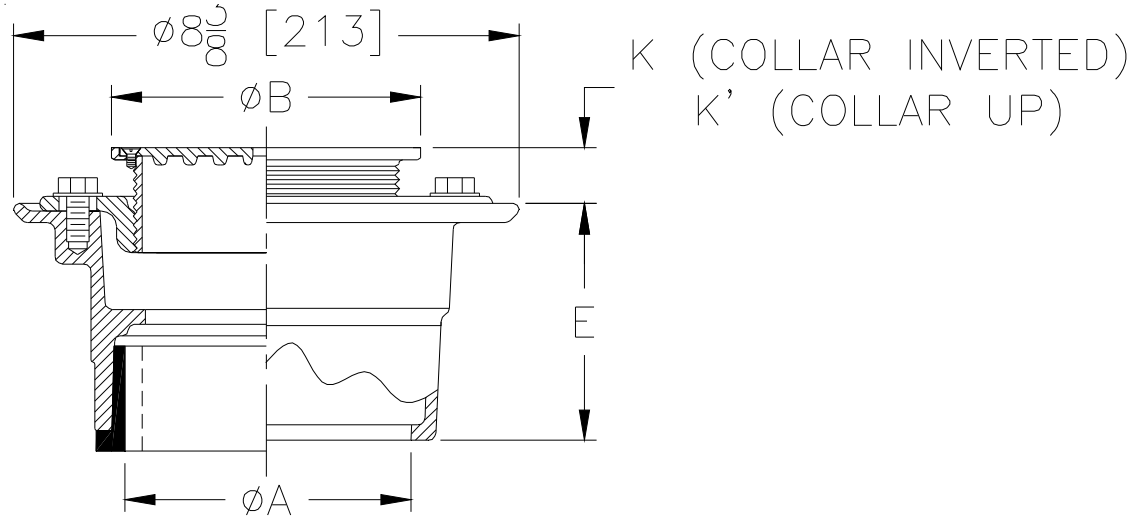

Str. Desig.	Dimensions In Inches						Approx. Wt. Lbs. [kg]	Strainer Open Area Sq. In. [cm²]
	A Pipe Size	B Strainer Dia.	K		K'			
			Min.	Max.	Min.	Max.		
-5A	2-3-4-6 [51-76-102-152]	5 [127]	1 [25]	2 [51]	1-5/8 [41]	2-5/8 [67]	11 [5]	7 [45]

ENGINEERING SPECIFICATION: ZURN ZX415-A
Floor and Shower Drain, Dura-Coated cast iron body with bottom outlet, combination invertible membrane clamp, and adjustable collar with "Type A" heavy-duty Dura-Coated cast iron strainer.

OPTIONS (Check/specify appropriate options)

PIPE SIZE	(Specify size/type) **OUTLET**		**E BODY HT. DIM.**
2,3,4 [51,76,102]	IC	Inside Caulk	3-7/8 [98]
2,3,4 [51,76,102]	IG	Inside Gasket	3-7/8 [98]
2,3,4,6 [51,76,102,152]	IP	Threaded	2-5/8 [67]
2,3,4 [51,76,102]	NH	No-Hub	3-7/8 [98]
2,3,4 [51,76,102]	NL	Neo-Loc	4-5/8 [117]

SUFFIXES

	-AR	Acid Resistant Epoxy Coated Cast Iron
	-DC	Debris Cover
	-EF	3/8 [10mm] Extension Frame
	-FS	Floating Slab
	-G	Galvanized Cast Iron
✓	-P	1/2 [13mm] Trap Primer Connection
	-SA	Stabilizer Assembly
	-SQ	Stabilizer Q-Deck
	-SR	Stabilizer Ring
	-TC	Neo-Loc Test Cap Gasket
	-U	1 [25mm] - 3 [76mm] High Extension Adapter
	-V	Backwater Valve
	-VP	Vandal-Proof Secured Top
	-X	Squeezin Backwater Valve
	-Y	Sediment Bucket
	-414	4 [102mm] Diameter Cast Iron Funnel
	-6NH	6 [152mm] No-Hub Outlet (6IP w/Z-1040)
	-90	2 [51mm], 3 [76mm] or 4 [102mm] Side Outlet Body Assembly (IP or NH only)

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. A **DATE: 01/22/13** **C.N. NO. 128705**

DWG. NO. 63635 **PRODUCT NO. ZX415-A**

ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292
In the U.S.: ZURN INDUSTRIES, LLC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514
Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com

ZN415-B

BODY ASSEMBLY WITH "TYPE B" STRAINER

SPECIFICATION SHEET

TAG FD FIN AREA

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

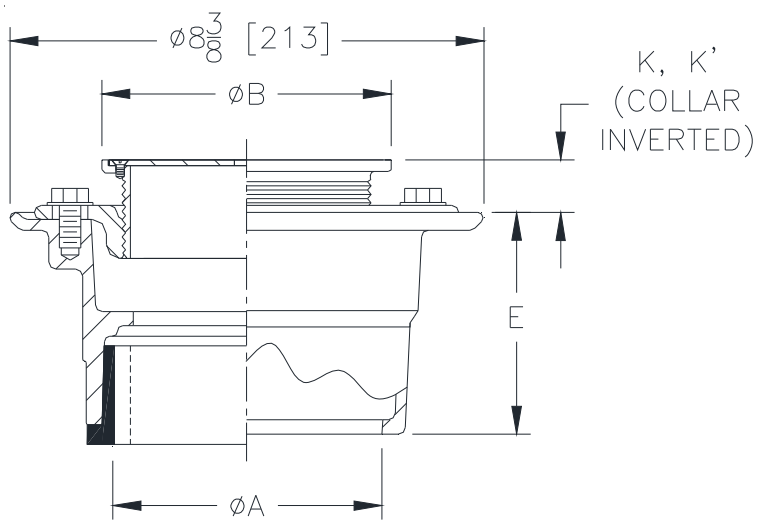

Strainer Designation	Dimensions In Inches [mm]						Approx. Weight lbs [kg]	Strainer Open Area Sq. In. [sq. cm]
	A' Pipe Size	B' Pipe Size	K		K'			
			Min.	Max.	Min.	Max.		
✓ -B5	2,3,4 [51, 76,102]	5 [127]	1/2 [13]	1-5/8 [41]	1-3/8 [35]	2-3/8 [60]	11 [5]	8 [52]
-B6	2,3,4 [51, 76,102]	6 [152]	3/4 [19]	1-3/4 [44]	1-5/8 [41]	2-3/4 [70]	13 [6]	9 [58]
-B7	2,3,4 [51, 76,102]	7 [178]	1 [25]	2-1/4 [57]	2 [51]	3-1/8 [79]	14 [6]	12 [77]
-B8	3,4 [76,102]	8 [203]	1-1/8 [29]	2-1/4 [57]	2 [51]	3-1/8 [79]	16 [7]	18 [116]
-B8	6 [152]	8 [203]	1-1/8 [29]	2-1/4 [57]	2 [51]	3-1/8 [79]	18 [8]	18 [116]

ENGINEERING SPECIFICATION: ZURN ZN-415-B

Floor and Shower Drain, Dura-Coated cast iron body with bottom outlet, combination invertible membrane clamp and adjustable collar with "Type B" polished nickel bronze strainer with stainless steel screws.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

2,3,4 [51,76,102]
2,3,4 [51,76,102]
2,3,4,6 [51,76,102,152]
2,3,4 [51,76,102]
2,3,4 [51,76,102]

(Specify size/type) **OUTLET**

_____ IC Inside Caulk
_____ IG Inside Gasket
_____ IP Threaded
_____ NH No-Hub
_____ NL Neo-Loc

E BODY HT. DIM.

3-7/8 [98]
3-7/8 [98]
2-5/8 [67]
3-7/8 [98]
4-5/8 [117]

SUFFIXES

_____ -AR Acid Resistant Epoxy Coated Cast Iron
_____ -FS Floating Slab
✓ -G Galvanized Cast Iron
_____ -P 1/2" [13mm] Trap Primer Connection
✓ -U 1" [25mm] - 3" [76mm] High Extension Adapter
_____ -VP Vandal-Proof Secured Top
_____ -X Squeezin Backwater Valve
_____ -Y Sediment Bucket
_____ -414 4" [102mm] Diameter Cast Iron Funnel
_____ -6NH 6" [152mm] No-Hub Outlet (6IP w/Z-1040)
_____ -90 2" [51mm], 3" [76mm] or 4" [102mm] Side Outlet Body Assembly (IP or NH only)

* Regularly furnished unless otherwise specified.

Zurn Industries, LLC | **Specification Drainage Operation**
1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929
In Canada | **Zurn Industries Limited**
3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292
www.zurn.com

Rev. B
Date: 07/06/2017
C.N. No. 137250
Prod. | Dwg. No. ZN415-B

Z -415-BF
BODY ASSEMLBY WITH "TYPE BF" STRAINER

SPECIFICATION SHEET

TAG FFD

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

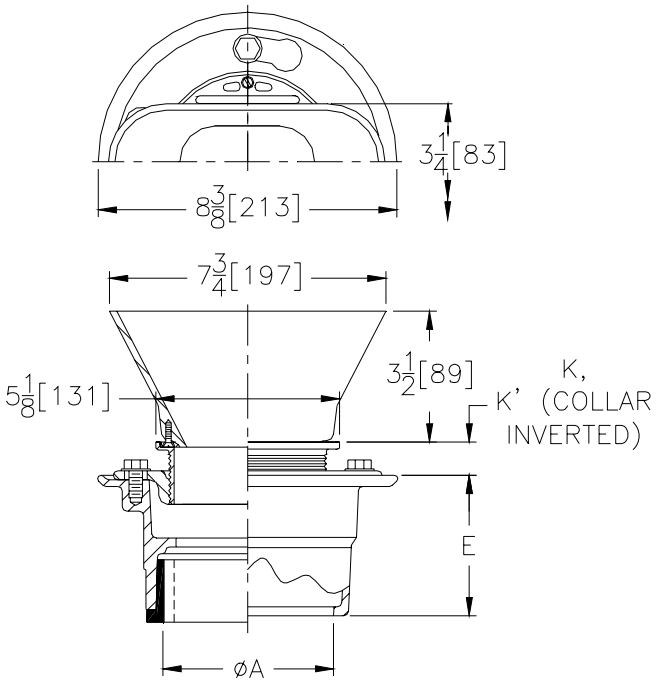

Str. Desig	Dimensions In Inches / [mm] A Pipe Size	Str. Dia.	K Min.	K Max.	K' Min.	K' Max.	Approx. Wt. Lbs. / (kg)	Strainer Open Area Sq. In. / [sq cm]
-BF	2-3-4-6 [51-76-102-152]	3-1/4 x 8 [83 x 203]	1/2 [13]	1-5/8 [41]	1-3/8 [35]	2-3/8 [60]	12 [5]	3 [19]

ENGINEERING SPECIFICATION: ZURN ZN-415-BF Oval Funnel Floor Drain, Dura-Coated cast iron body with bottom outlet, combination invertible membrane clamp and adjustable collar with "Type BF" cast iron open throat oval funnel grate with stainless steel screws.

OPTIONS (Check/specify appropriate options)

PIPE SIZE	(Specify size/type) OUTLET		E BODY HT. DIM.
2,3,4 [50,75,100]	☐ IC	Inside Caulk	3 7/8 [98]
2,3,4 [50,75,100]	☐ IG	Inside Gasket	3 7/8 [98]
2,3,4,6 [50,75,100,152]	☐ IP	Threaded	2 5/8 [67]
2,3,4 [50,75,100]	✔ NH	No-Hub	3 7/8 [98]
2,3,4 [50,75,100]	☐ NL	Neo-Loc	4 5/8 [117]

SUFFIXES

- ☐ -AR Acid Resistant Epoxy Coated Cast Iron
- ☐ -FS Floating Slab
- ☐ -G Galvanized Cast Iron
- ✔ -P 1/2" [13mm] Trap Primer Connection
- ☐ -U 1" [25mm] - 3" [76mm] High Extension Adapter
- ✔ -VP Vandal-Proof Secured Top
- ☐ -X Squeezin Backwater Valve
- ☐ -Y Sediment Bucket
- ☐ -6NH 6" [152mm] No-Hub Outlet (6IP w/Z-1040)
- ☐ -90 2" [51mm], 3" [76mm] or 4" [102mm] Side Outlet Body Assembly (IP or NH only)

±REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. A DATE: 06/16/05 C.N. NO. 89831

DWG. NO. 63639 PRODUCT NO. ZN-415-BF

ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V 1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292
In the U.S.: ZURN INDUSTRIES, INC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514
Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com

Z -415-BE
BODY ASSEMLBY WITH "TYPE BE" STRAINER

SPECIFICATION SHEET

TAG FFD 4" FUNNEL

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

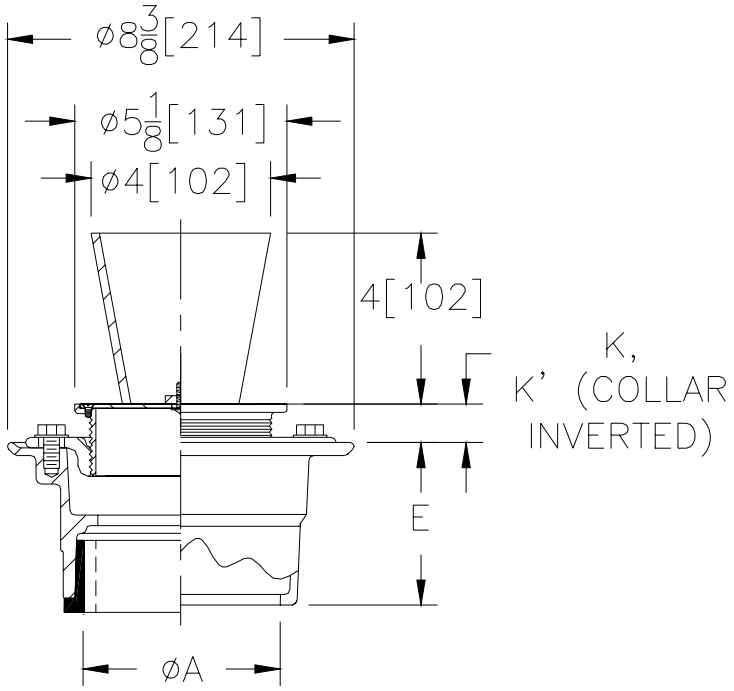

Str. Desig.	Dimensions In Inches / [mm] A Pipe Size	Str. Dia.	K Min.	K Max.	K' Min.	K' Max.	Approx. Wt. Lbs. / (kg)	Strainer Open Area Sq. In. / [sq cm]
-BE5	2-3-4-6 [51-76-102-152]	5 [127]	1/2 [13]	1-5/8 [41]	1-3/8 [35]	2-3/8 [60]	8 [4]	5 [32]

ENGINEERING SPECIFICATION: ZURN Z-415-BE Funnel Floor Drain, Dura-Coated cast iron body with bottom outlet, combination invertible membrane clamp and adjustable collar with "Type BE" cast iron round funnel grate with stainless steel screws.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

2,3,4 [50,75,100]
2,3,4 [50,75,100]
2,3,4,6 [50,75,100,152]
2,3,4 [50,75,100]
2,3,4 [50,75,100]

(Specify size/type) **OUTLET**

☐	IC	Inside Caulk
☐	IG	Inside Gasket
☐	IP	Threaded
☐	NH	No-Hub
☐	NL	Neo-Loc

E BODY HT. DIM.

3 7/8 [98]
3 7/8 [98]
2 5/8 [67]
3 7/8 [98]
4 5/8 [117]

SUFFIXES

☐	-AR	Acid Resistant Epoxy Coated Cast Iron
☐	-FS	Floating Slab
☐	-G	Galvanized Cast Iron
✔	-P	1/2" [13mm] Trap Primer Connection
☐	-U	1" [25mm] - 3" [76mm] High Extension Adapter
☐	-VP	Vandal-Proof Secured Top
☐	-X	Squeezin Backwater Valve
✔	-Y	Sediment Bucket
☐	-6NH	6" [152mm] No-Hub Outlet (6IP w/Z-1040)
☐	-90	2" [51mm], 3" [76mm] or 4" [102mm] Side Outlet Body Assembly (IP or NH only)

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. A DATE: 06/16/05 C.N. NO. 89830

DWG. NO. 63638 PRODUCT NO. ZN-415-BE

ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V 1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292
In the U.S.: ZURN INDUSTRIES, INC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514
Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com

Z121
12" [305] DIAMETER ROOF DRAIN

SPECIFICATION SHEET

TAG RD

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

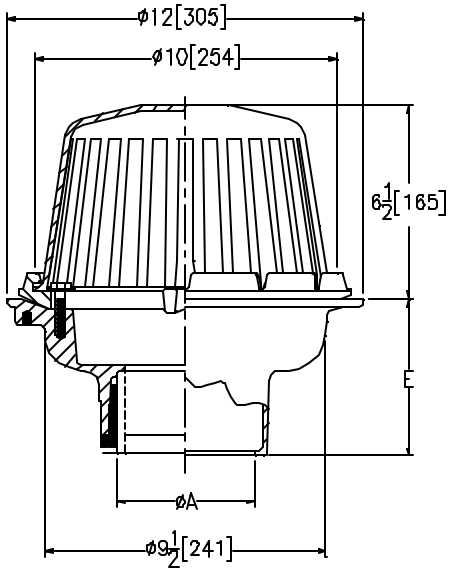

A Pipe Size Inches / [mm]	Approx. Wt. Lbs. / [kg]	Dome Open Area Sq. In. / [sq cm]
2-3-4 [51-76-102]	22 [10]	78 [503]
5-6 [127-152]		

ENGINEERING SPECIFICATION: ZURN Z121 12" [305] diameter roof drain. Dura-Coated cast iron body with combination membrane flashing clamp/gravel guard and Poly-Dome.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

2 thru 6 [50 thru150]
2 thru 6 [50 thru 150]
2 thru 6 [50 thru 150]
2,3,4 [50,75,100]

(Specify size/type) **OUTLET**

____	IC	Inside Caulk
____	IP	Threaded
____	NH	No-Hub
____	NL	Neo-Loc

E BODY HT. DIM.

5 1/4 [133]
3 3/4 [95]
5 1/4 [133]
4 5/8 [117]

PREFIXES

____	Z	D.C.C.I. Body with Poly-Dome*
✓	ZA	D.C.C.I. Body with Aluminum Dome
____	ZC	D.C.C.I. Body with Cast Iron Dome
____	ZRB	D.C.C.I. Body with Plain Bronze Dome

SUFFIXES

____	-A	Waterproof Flange
____	-AR	Acid Resistant Epoxy Coated Finish
____	-BS	Bronze Mesh Screen Over Dome
✓	-C	Underdeck Clamp
____	-DP	Top Set® Roof Deck Plate (Replaces both the -C and -R)
____	-DR	Adjustable Drain Riser Extension Assembly 3-5/8" [92] to 7-1/4" [184]
____	-E	Static Extension 1 [25] thru 4 [102] (Specify Ht.)
____	-EB	Elevating Body Plate
____	-ES	Static Extension with Secondary Clamp Collar at Body (For clamping at roof drain body)
____	-FG	Flush Grate
____	-G	Galvanized Cast Iron
✓	-R	Roof Sump Receiver
____	-SC	Secondary Clamp Collar
____	-SE	3 3/8 [86] Slotted Extension
____	-SSM	Stainless Steel Mesh Screen Over Dome
____	-TC	Neo-LocTest CapGasket (2 [51] to 4 [102] NL Bottom Outlet Only)
____	-VP	Vandal Proof Secured Top
____	-XJ	Vertical Expansion Joint (See Z-1900
____	-84	Stainless Steel Perforated Gravel Guard
____	-85	Stainless Steel Perforated Extension
____	-89	2 [51] High External Water Dam
____	-90	90º Threaded Side Outlet Body

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. B DATE: 05/17/04 C.N. NO. 89815

DWG. NO. 63602 PRODUCT NO. Z121

ZURN INDUSTRIES LIMITED ¨ 3544 Nashua Drive ¨ Mississauga, Ontario L4V 1L2 ¨ Phone: 905/405-8272 Fax: 905/405-1292
In the U.S.: ZURN INDUSTRIES, INC. ¨ SPECIFICATION DRAINAGE OPERATION ¨ 1801 Pittsburgh Ave. ¨ Erie, PA 16514
Phone: 814/455-0921 ¨ Fax: 814/454-7929 ¨ World Wide Web: www.zurn.com

Z100
15" [381] DIAMETER MAIN ROOF DRAIN

SPECIFICATION SHEET

TAG RD

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

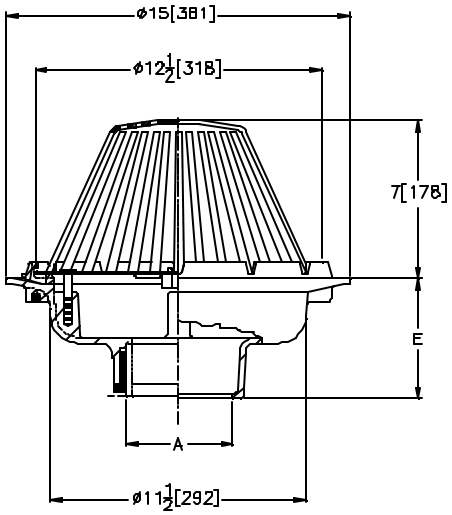

A Pipe Size Inches / [mm]	Approx. Wt. Lbs. / [kg]	Dome Open Area Sq. In. / [sq cm]
2-3-4 [51-76-102]	26 [12]	148 [955]
5-6 [127-152]	27 [12]	
8 [203]	28 [13]	

ENGINEERING SPECIFICATION: ZURN Z100 15 [381] diameter roof drain. Dura-Coated cast iron body with combination membrane flashing clamp/gravel guard and Poly-Dome.

OPTIONS (Check/specify appropriate options)

PIPE SIZE

2 thru 6, 8 [50 thru 150,200]
2 thru 6, 8 [50 thru 150,200]
2 thru 6, 8 [50 thru 150,200]
2,3,4 [50,75,100]

(Specify size/type) **OUTLET**

IC	Inside Caulk	5 1/4 [133]
IP	Threaded	3 3/4 [95]
NH	No-Hub	5 1/4 [133]
NL	Neo-Loc	4 5/8 [117]

E BODY HT. DIM.

PREFIXES

Z	D.C.C.I. Body with Poly-Dome*
✓ ZA	D.C.C.I. Body with Aluminum Dome
ZC	D.C.C.I. Body with Cast Iron Dome
ZRB	D.C.C.I. Body with Plain Bronze Dome

SUFFIXES

-A	Waterproof Flange
-AC	Angular Underdeck Clamp
-AR	Acid Resistant Epoxy Coated Finish
-AW	3/4 [19] to 4 [102] Adj. Water Level Regulator
-BS	Bronze Mesh Screen Over Dome
✓ -C	Underdeck Clamp
-DP	Top Set® Roof Deck Plate (Replaces both the -C and -R)
-DR	Adjustable Drain Riser Extension Assembly 3-5/8" [92] to 7-1/4" [184]
-DX	Dex-O-Tex Flange
-E	Static Extension 1 [25] thru 4 [102] (Specify Ht.)
-EA	Adjustable Extension Assembly 1 3/4 [44] thru 3 1/2 [89]
-EB	Elevating Body Plate
-ES	Static Extension with Secondary Clamp Collar Body
-FG	Flush Grate (Replaces Dome Strainer)
-G	Galvanized Cast Iron
-GD	Galvanized Cast Iron Dome (ZC Only)
✓ -R	Roof Sump Receiver
-SC	Secondary Clamp Collar
-SE	3 3/4 [95] Slotted Extension - Inverted Roof
-SSM	Stainless Steel Mesh Screen Over Dome
-TC	Neo-LocTest CapGasket (2 [51] to 4 [102] N Bottom Outlet Only)
-VP	Vandal Proof Secured Top
-W	Internal Water Dam (Specify 2 [51], 3 [76], 4 [100])
-XJ	Vertical Expansion Joint (See Z-190)
-84	Stainless Steel Perforated Gravel Guard
-89	2 [51] High External Water Dam
-90	90º Threaded Side Outlet Body

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. A DATE: 05/17/04 C.N. NO. 89814

DWG. NO. 63600 PRODUCT NO. Z100

ZURN INDUSTRIES LIMITED ¨ 3544 Nashua Drive ¨ Mississauga, Ontario L4V 1L2 ¨ Phone: 905/405-8272 Fax: 905/405-1292
In the U.S.: ZURN INDUSTRIES, INC. ¨ SPECIFICATION DRAINAGE OPERATION ¨ 1801 Pittsburgh Ave. ¨ Erie, PA 16514
Phone: 814/455-0921 ¨ Fax: 814/454-7929 ¨ World Wide Web: www.zurn.com

Z1095
BACKWATER VALVE
FLAPPER TYPE

SPECIFICATION SHEET

TAG BWV

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

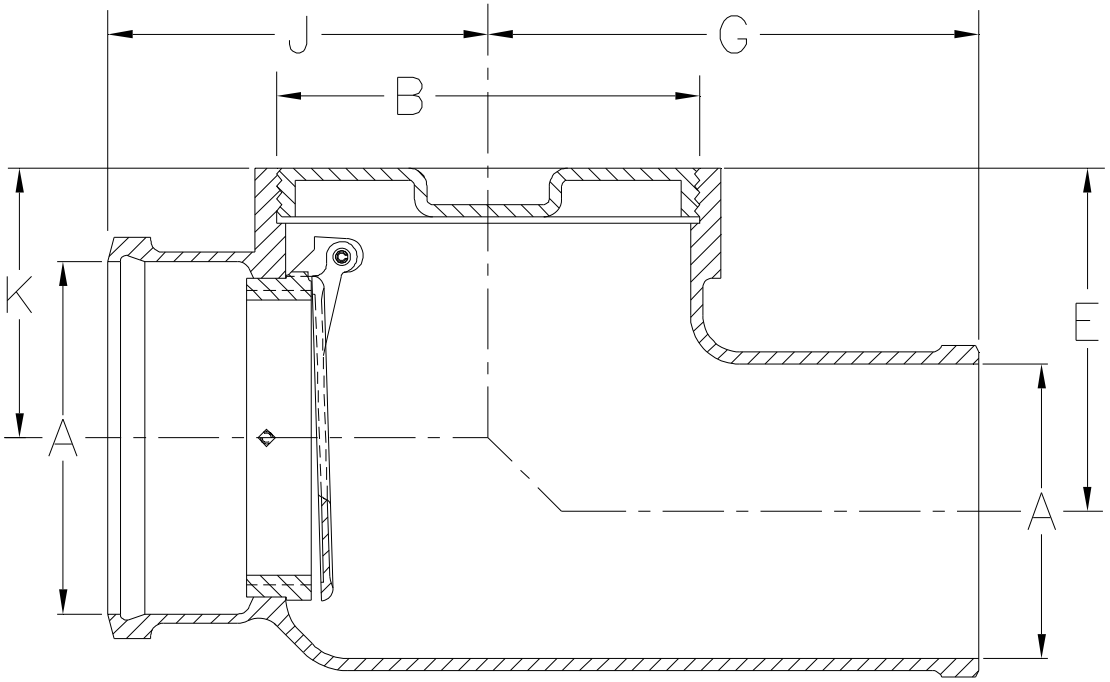

Dimensions In Inches						Approx. Wt. Lbs. [kg]
Pipe Size		E	G	J	K	
A	B					
2 [52]	4 [102]	4-3/8 [111]	7 [178]	5 [127]	2-7/8 [73]	23 [10]
3 [76]	5 [127]	5-1/8 [130]	8 [203]	6 [152]	3-5/8 [92]	30 [14]
4 [102]	6 [152]	5-5/8 [143]	8-1/2 [216]	6-3/4 [171]	4-1/8 [105]	34 [15]
5 [127]	7 [178]	5-1/2 [140]	9-1/2 [241]	7-1/4 [184]	4 [102]	50 [23]
6 [152]	8 [203]	6 [156]	10 [254]	7-3/4 [197]	4-1/2 [114]	57 [26]
8 [203]	10 [254]	7-1/2 [190]	11-7/8 [302]	9-3/8 [238]	6 [152]	79 [36]
10 [254]	12 [305]		12-3/4 [324]	10-7/8 [276]	7 [178]	102 [46]

ENGINEERING SPECIFICATION: ZURN Z1095 Backwater Valve, Dura-Coated cast iron body, hub inlet and offset spigot outlet, bronze threaded cover, automatic PVC (3 [76] and 4 [102] sizes only) flapper type backwater valve with O-ring.

CONNECTIONS (Check/specify appropriate options)

PIPE SIZE

2 thru 6, 8, 10 [52 thru 152, 203, 254]

(Specify size) **CONNECTION**

☐ HB X SP Hub x Spigot

PREFIXES

☑ Z D.C.C.I. Body*

SUFFIXES

☑ -BC Bolted Cover
☑ -BV Bronze Flapper Valve (3 and 4 [76 thru 102] Sizes)
☐ -G Galvanized Cast Iron

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. E DATE: 11/01/10 C.N. NO. 120208

DWG. NO. 58902 PRODUCT NO. Z1095

ZURN INDUSTRIES, LLC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514
Phone: 814\455-0921 ♦ Fax: 814\454-7929 ♦ World Wide Web: www.zurn.com
In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905\405-8272 Fax: 905\405-1292

TAG:WASHING MACHINE

WM2961

ENCASED WASHING MACHINE VALVE

Dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

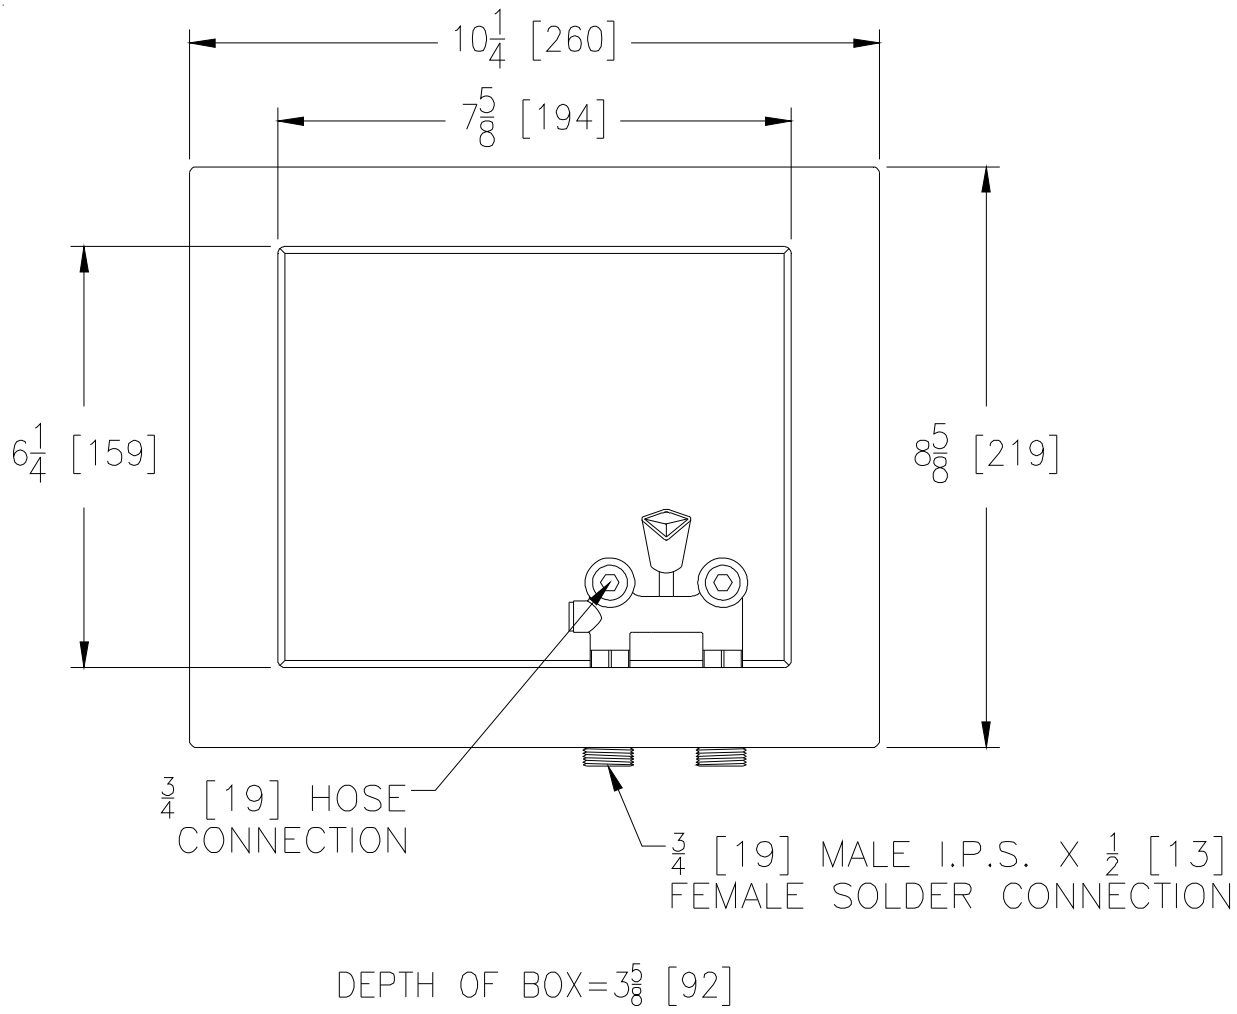

Model Number	Connections Inches [mm]	Approx. Wt. Lbs. [cm^2]
WM2961-34	3/4 [19] M.I.P. x 1/2 [13] Solder Inlet	3 [1]

ENGINEERING SPECIFICATION: ZURN WM2961
Encased washing machine valve designed to improve overall appearance of the laundry room. Complete with single lever handle valve, heavy-duty mounting straps, knockouts for a right or left mounting, and a 1-1/2" [38mm] x 2" [51mm] tailpiece that adapts easily to either ABS or PVC standpipe.

⚠**WARNING**: Cancer and Reproductive Harm - www.P65Warnings.ca.gov
⚠**ADVERTENCIA:** Cáncer y daño reproductivo - www.P65Warnings.ca.gov
⚠**AVERTISSEMENT:** Cancer et effets néfastes sur la reproduction - www.P65Warnings.ca.gov

*Regularly furnished unless otherwise specified.

Zurn Industries, LLC | **Specification Drainage Operation**
1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929
In Canada | **Zurn Industries Limited**
3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292
www.zurn.com

Rev. B
Date: 6/6/2018
C.N. No. 140116
Prod. | Dwg. No. WM2961

Z1201-N_4

EZCARRY® ADJUSTABLE HORIZONTAL HIGH PERFORMANCE SIPHON JET NO-HUB WATER CLOSET CARRIER SYSTEM

SPECIFICATION SHEET

TAG W-1 AND WH-1

Design and Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

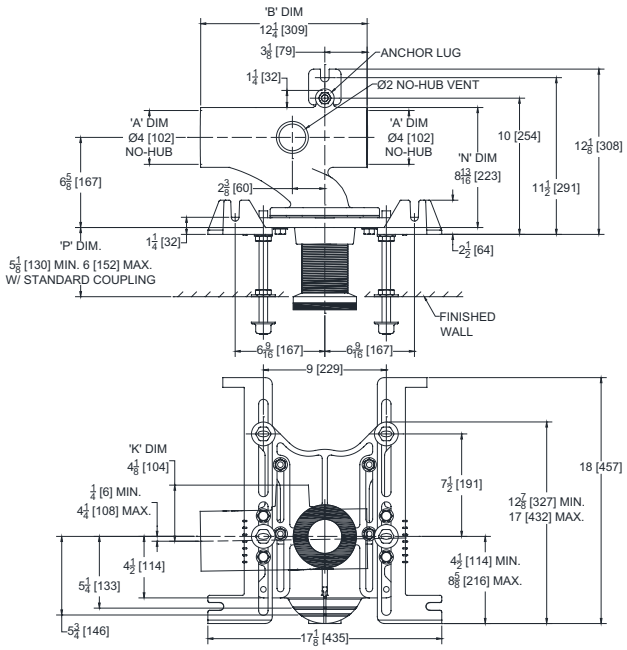

Product Number	Approx. Wt. lbs [kg]
Z1201-NL4	58 [26]
Z1201-NR4	

Note:

1. Z coupling, Min. 'P' Dim Obtainable=2 [51].EZ-Set™ Coupling, Min. 'P' Dim. Obtainable=4-1/4 [108] or 2-1/16 [52] for 12 [305] NPT.
2. Feet bolted to floor using min.1/2 [13] dia. anchors.
3. Rear anchor foot required for secure installation.

Z1201-NR4 Illustrated

ENGINEERING SPECIFICATION: ZURN Z1201-N_4

EZCarry® horizontal siphon jet water closet carrier system with high performance waterway and 4" [102mm] no-hub connections. System includes Dura-Coated cast iron main fitting with hydro-mechanically optimized sweep and extended 2" [51mm] vent, adjustable gasketed faceplate, floor mounted pre-fab slotted foot supports with top anchoring pre-fab support base, heavy-duty 1/2" [13mm] rear anchor tie down, fixture bolts, trim, stud protectors, bonded "Neo-Seal" gasket, and corrosion resistant, adjustable 3" [76mm] dia. X 6" [152mm] coupling with integral test cap designed to increase flow velocity and line carry. EZCarry® system complies with the requirements of ASME A112.6.1M up to a 500 lbs [227 kg] static load rating

OPTIONS (Check/specify appropriate options)

____ Z1201-NL4 4 [102] No-Hub Left Hand Inlet with Flow to Right
____ Z1201-NR4 4 [102] No-Hub Right Hand Inlet with Flow to Left

PREFIXES

__✓__ Z D.C.C.I. System with Zurn ZZ Adjustable Coupling*
____ ZQ D.C.C.I. System with NPT Faceplate, Non-Adjustable Coupling

SUFFIXES

____ -A Auxiliary Support Assembly (For 'P' Dim. Greater than 18 [457])
____ -CC Corrosion Resistant Cast Iron Coupling (2-1/4 [57] to 12 [305])
____ -CE EZ-Set™ Coupling (NPSM 6 [152] ,12 [305] or custom) (NPT 12 [305] or custom)
____ -CL Custom Length Standard Coupling with Integral TestCap (Specify Length 4, 8, 10, 12 [102, 203, 254, 305])
____ -CS 2-1/4 [57] Polymer Coupling with Integral Test Cap
____ -F Floor Mounted, Back Outlet Fixture Support
____ -G Galvanized Cast Iron
____ -JC 2 [51] Auxiliary Inlet with 1/8 Bend
____ -M Auxiliary Foot Support (for 'P' Dim. 7 thru 18 [178 thru 457])
____ -RYK17 One Piece Unistrut Pre-Fab Foot
____ -VP Vandal-Proof Trim
____ -X2 2 [51] Carrier Foot Extension Assembly
____ -X3 3 [76] Carrier Foot Extension Assembly
____ -45 Finishing Frame for Siphon Jet System
____ -50 Flush Valve Supply Support for Water Closets

* Regularly furnished unless otherwise specified.

⚠ **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov
⚠ **ADVERTENCIA:** Cáncer y daño reproductivo - www.P65Warnings.ca.gov
⚠ **AVERTISSEMENT:** Cancer et effets néfastes sur la reproduction - www.P65Warnings.ca.gov

Zurn Industries, LLC | Specification Drainage Operation
1801 Pittsburgh Avenue, Erie, PA USA 16502, Ph. 855.663.9876

In Canada | Zurn Industries Limited
7900 Goreway Drive, Unit 10, Brampton, Ontario L6T 5W6, Ph. 877.892.5216

www.zurn.com

Rev. M
Date: 01/05/23
C.N. No. 144897
Patent zurn.com/patents
Prod. | Dwg. No. Z1201-N_4

Z1201-ND4

EZCARRY® ADJUSTABLE HORIZONTAL HIGH PERFORMANCE BACK-TO-BACK SIPHON JET NO-HUB WATER CLOSET CARRIER SYSTEM

SPECIFICATION SHEET

TAG W-1 AND WH-1

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

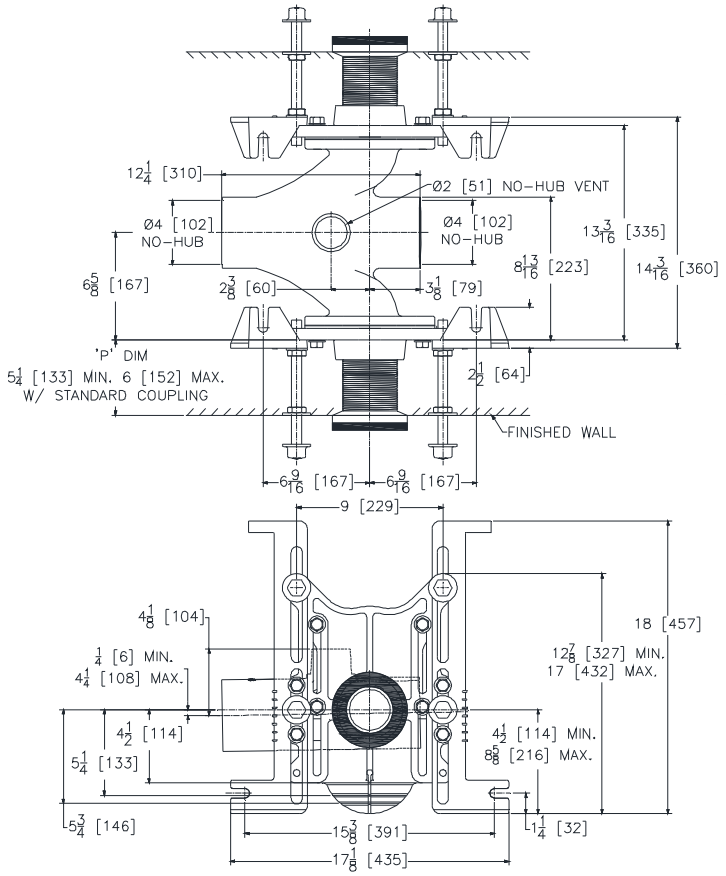

Product Number	Approx. Wt. lbs [kg]
Z1201-ND4	104 [47]

Note:

1. Z coupling, Min. 'P' Dim. Obtainable=2 [51]. EZ-Set™ Coupling, Min. 'P' Dim. Obtainable=4-1/4 [108] or 2-1/16 [52] for 12 [305] NPT.
2. Feet bolted to floor using min. 1/2 [13] dia. anchors.

ENGINEERING SPECIFICATION: ZURN Z1201-ND4

EZCarry® horizontal siphon jet water closet carrier system with high performance waterway and 4" [102mm] no-hub connections. System includes Dura-Coated cast iron double main fitting with hydro-mechanically optimized sweep and extended 2" [51mm] vent, adjustable gasketed faceplates, floor mounted pre-fab slotted foot supports with top anchoring pre-fab support base, fixture bolts, trim, stud protectors, bonded “Neo-Seal” gaskets, and corrosion resistant, adjustable 3" [76mm] dia. X 6" [152mm] couplings with integral test caps designed to increase flow velocity and line carry. EZCarry® system complies with the requirements of ASME A112.6.1M up to a 500 lbs [227 kg] static load rating.

OPTIONS (Check/specify appropriate options)

Z1201-ND4 4 [102] No-Hub Back-to-Back Inlet (Double)

PREFIXES

- ✓ Z — D.C.C.I. System with Zurn ZZ Adjustable Coupling*
- ____ ZQ — D.C.C.I. System with NPT Faceplate, Non-Adjustable Coupling

SUFFIXES

- ____ -A — Auxiliary Support Assembly (For 'P' Dim. Greater than 18 [457])
- ____ -CC — Corrosion Resistant Cast Iron Coupling (2-1/4 [57] to 12 [305])
- ____ -CE — EZ-Set™ Coupling (NPSM 6 [152] ,12 [305] or custom) (NPT 12 [305] or custom)
- ____ -CL — Custom Length Standard Coupling with Integral Test Cap (Specify Length 4, 8, 10, 12 [102, 203, 254, 305])
- ____ -CS — 2-1/4 [57] Polymer Coupling with Integral Test Cap
- ____ -F — Floor Mounted, Back Outlet Fixture Support
- ____ -G — Galvanized Cast Iron
- ____ -M — Auxiliary Foot Support (for 'P' Dim. 7 thru 18 [178 thru 457])
- ____ -RYK — Unistrut Pre-Fab Foot Support
- ____ -VP — Vandal-Proof Trim
- ____ -45 — Finishing Frame for Siphon Jet System
- ____ -50 — Flush Valve Supply Support for Water Closets

* Regularly furnished unless otherwise specified.

Zurn Industries, LLC | **Specification Drainage Operation**
1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929
In Canada | **Zurn Industries Limited**
3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292
www.zurn.com

Rev. K
Date: 09/19/18
C.N. No. 140612
Prod. | Dwg. No. Z1201-ND4

Z1231

CONCEALED ARM SYSTEM
WALL LAVATORIES

SPECIFICATION SHEET

TAG LH-2

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

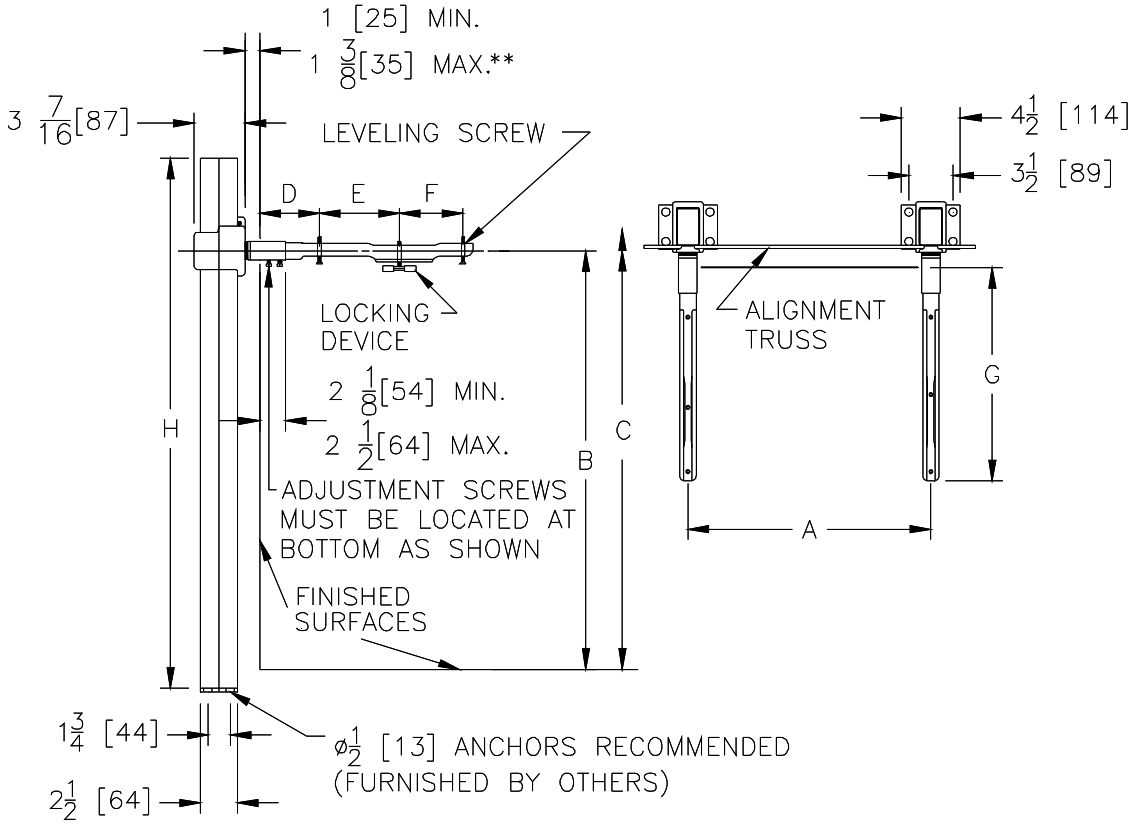

** WITH STANDARD SLEEVE LENGTH OF 4 [102]

Product No.	Approx. Wt. Lbs. [kg]
Z1231	45 [20]

ENGINEERING SPECIFICATION: ZURN Z1231 Lavatory support system with concealed arms. Complete with Dura-Coated rectangular steel uprights with welded feet, cast iron adjustable headers, concealed arms, steel sleeves, alignment truss, and mounting fasteners.

OPTIONS (Check/specify appropriate options)

Note: Dimensional data for letter dimensions depends upon fixture type and manufacturer. See Zurn Carrier/Fixture Rough-In information at www.zurn.com for specific rough-in dimensions

PREFIXES

- [x] Z — Dura-Coated System with Concealed Arms*

SUFFIXES

- [ ] -AL — Adapter Lug
- [ ] -CB — Carrier Bank
- [ ] -CU — Floor to Ceiling Upright (Specify Height Required)
- [ ] -D — Back to Back System
- [ ] -E2 — Concealed Arm Escutcheons 2 [51] Long
- [ ] -E4 — Concealed Arm Escutcheons 4 [102] Long
- [ ] -E6 — Concealed Arm Escutcheons 6 [152] Long
- [ ] -SL — Sleeve Length Over 4 [102] (Specify Length)
- [ ] -WS — Wall Support Valve Plate (Specify Valve Name and Number)
- [ ] -79 — Paraplegic Rough-in

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. I **DATE: 11/29/10** **C.N. NO. 120530**

DWG. NO. 58855 **PRODUCT NO. Z1231**

ZURN INDUSTRIES, LLC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514
Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com
In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292

Z1221
PLATE TYPE SYSTEM
WALL URINALS

SPECIFICATION SHEET

TAG WF

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

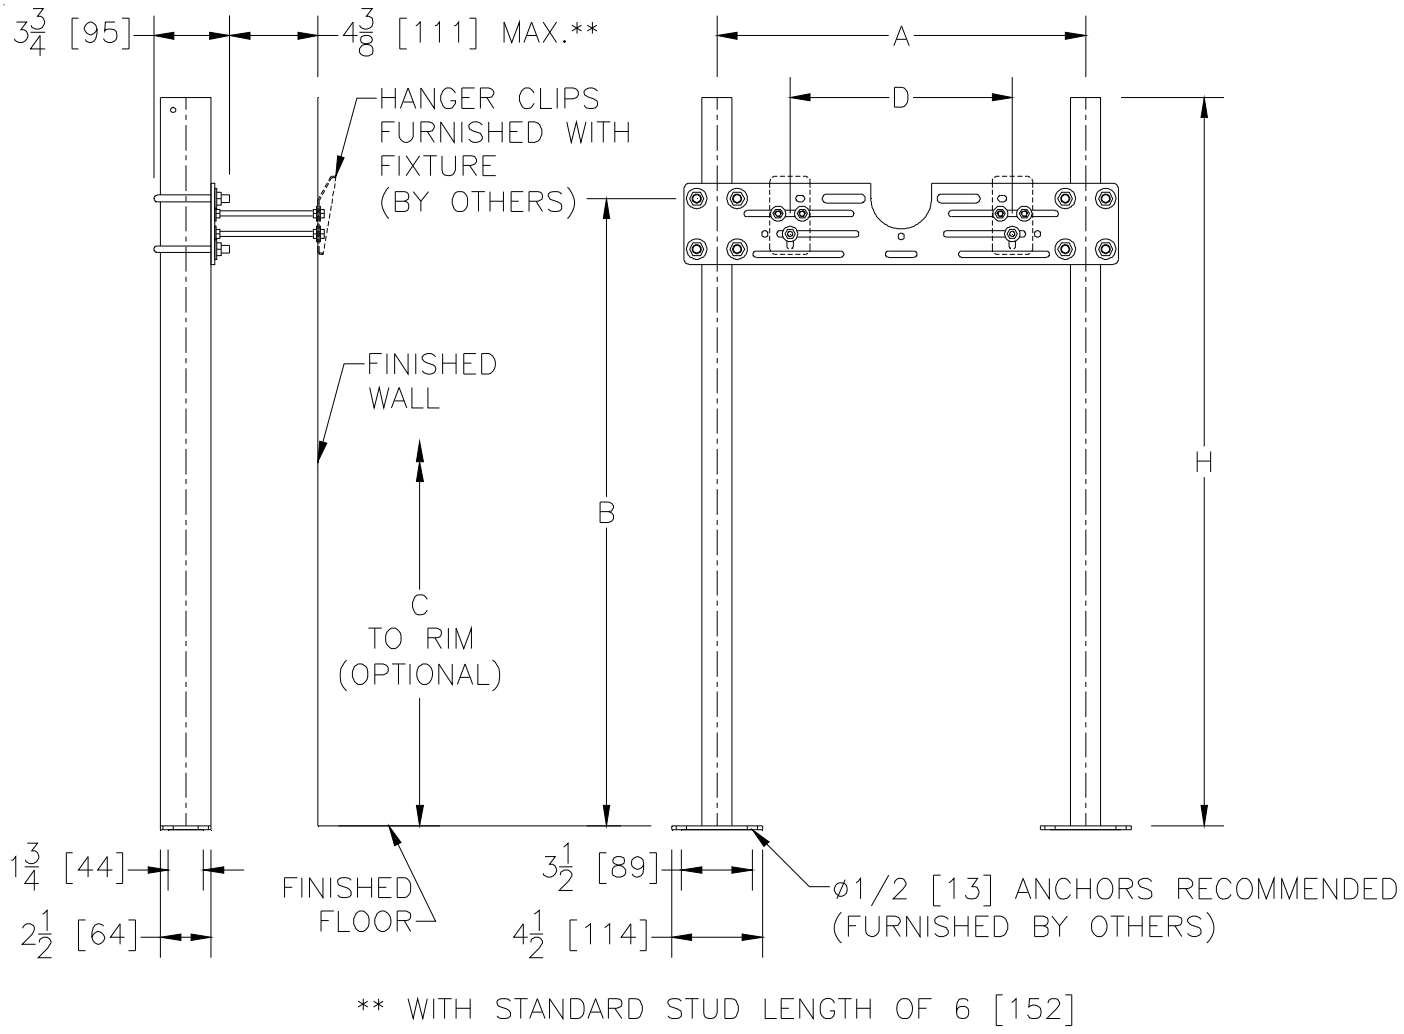

** WITH STANDARD STUD LENGTH OF 6 [152]

Product No.	Approx. Wt. Lbs. [kg]
Z1221	50 [23]

ENGINEERING SPECIFICATION: ZURN Z1221 Wall urinal support system with top support plate. Complete with Dura-Coated rectangular steel uprights with welded feet, adjustable support plate, and mounting fasteners.

Note: Dimensional data for letter dimensions depends upon fixture type and manufacturer. See Zurn Carrier/Fixture Rough-In Information at www.zurn.com for specific rough-in dimensions.

OPTIONS (Check/specify appropriate options)

PREFIXES

- [x] Z — Dura-Coated System with Universal Plate*

SUFFIXES

- [ ] -CB — Carrier Bank
- [ ] -CU — Floor to Ceiling Upright
- [ ] -D — Back to Back System
- [ ] -EZ — Easy to Install Assembly
- [ ] -SL — Stud Length Greater Than 6 [152] (Specify Length)
- [ ] -58 — Flush Valve Supply Support

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. E **DATE: 11/4/10** **C.N. NO. 120243**

DWG. NO. 58849 **PRODUCT NO. Z1221**

ZURN INDUSTRIES, LLC ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514
Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com
In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292

Z1225
PLATE TYPE SYSTEM
WATER COOLERS

SPECIFICATION SHEET

TAG BFS

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

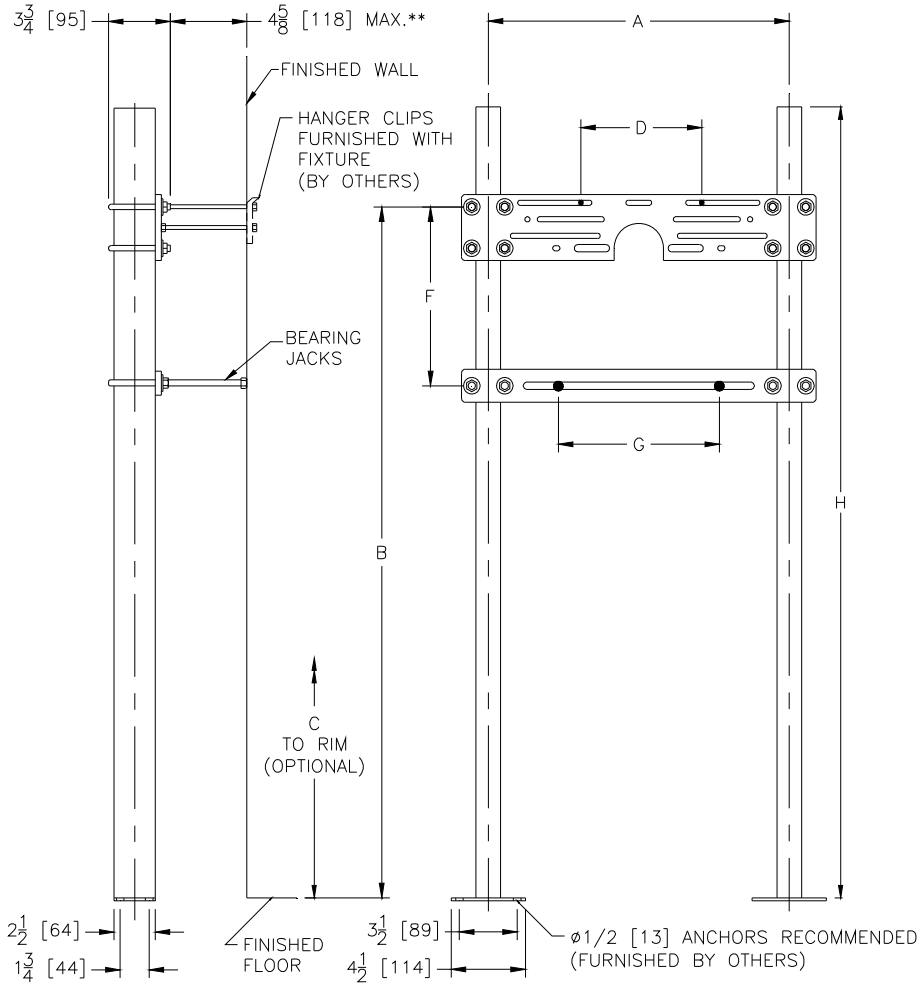

** WITH STANDARD STUD LENGTH OF 6 [152].

Product No.	Approx. Wt. Lbs. [kg]
Z1225	49 [22]

ENGINEERING SPECIFICATION: ZURN Z1225 Water cooler support system with top and bottom plates. Complete with Dura-Coated rectangular steel uprights with welded feet, adjustable support plates, and mounting fasteners.

Note: Dimensional data for letter dimensions depends upon fixture type and manufacturer. See Zurn Carrier/Fixture Rough-In information at www.zurn.com for specific rough-in dimensions

OPTIONS (Check/specify appropriate options)

PREFIXES

- [x] Z — Dura-Coated System with Universal Plate*

SUFFIXES

- [ ] -BL — Bi-Level Cooler Support
- [ ] -BR — Bracket Support
- [ ] -CB — Carrier Bank
- [ ] -D — Back to Back System
- [ ] -EZ — Easy to Install Assembly
- [ ] -L2 — Less Bearing Plate
- [ ] -SL — Stud Length Over 6 [152] (Specify Length)

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

REV. E	**DATE: 11/4/10**	**C.N. NO. 120512**
DWG. NO. 58853		**PRODUCT NO. Z1225**

ZURN INDUSTRIES, LLC. ♦ SPECIFICATION DRAINAGE OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie, PA 16514
Phone: 814/455-0921 ♦ Fax: 814/454-7929 ♦ World Wide Web: www.zurn.com
In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292